

SAW Filter $\Phi\Pi3\Pi7-509-801$

Application:

Input circuits of transmitting and reseiving equipments of common applications

Measuring conditions:

- $t=25\text{ }^\circ\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: DIP 4K



Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	803
Insertion loss	dB	7,5
3 dB bandwidth	MHz	14
40 dB bandwidth	MHz	60
Relative attenuation	dB	65
Temperature coefficient of frequency	ppm	-70

Frequency Response

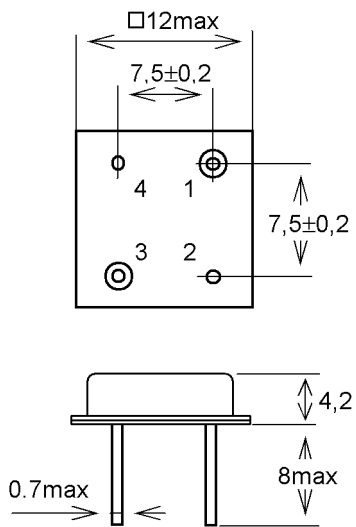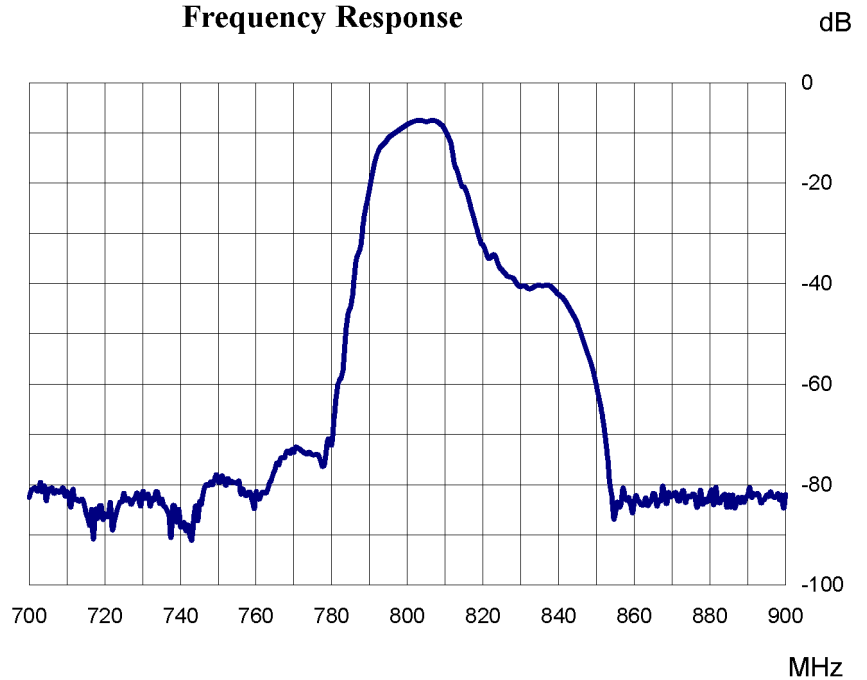

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya , 29

Tel/fax (495) 411-96-08; 411-96-09

E-Mail: Butis.M@ru.net

<http://www.butis-m.ru>