

SAW Filter ФП3П7-512-8

Application:

Input circuits of transmitting and receiving equipments of common applications

Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: QLCC 10.10-1



Pin configuration:

- 2 – input;
- 7 – output;
- other – ground

Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	676,0
Insertion loss	dB	4,5
3 dB bandwidth	MHz	16,0
35 dB bandwidth	MHz	85,0
Relative attenuation	dB	35
Temperature coefficient of frequency	ppm	-70

Frequency Response

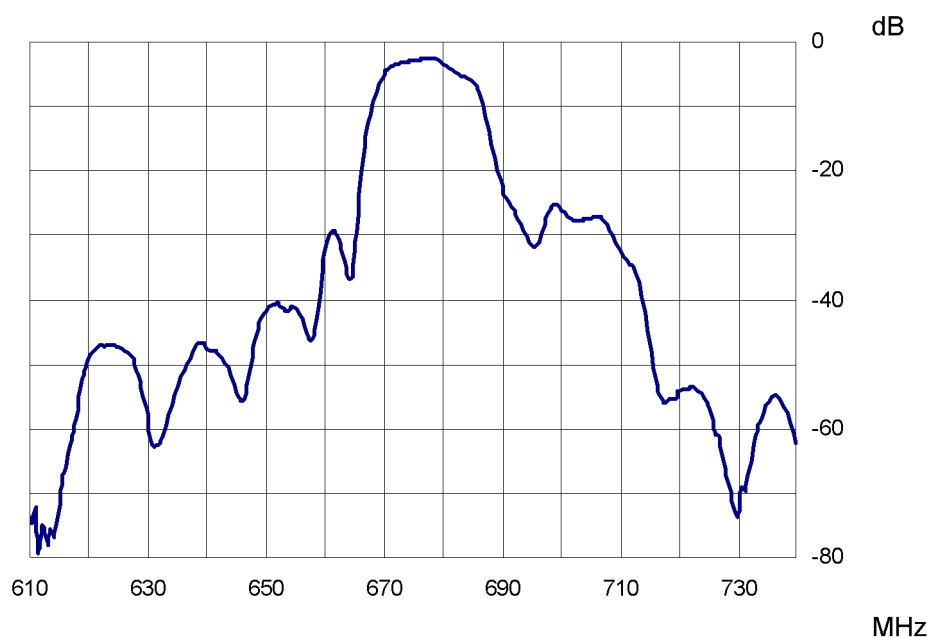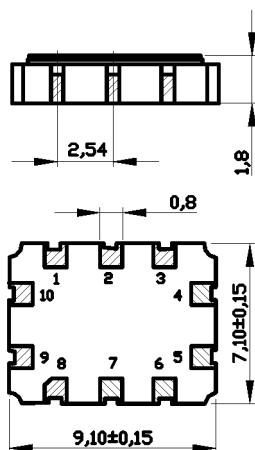

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya, 29

Tel/fax (495) 411-96-08; 411-96-09

E-mail: Butis.M@ru.net

<http://www.butis-m.ru>