

# Bandpass filter ФТКП-1

## TV channel filter

### Application:


- for CATV
- for TV-broadcasting equipment

### The mode of measurement:

- $t=25\text{ }^{\circ}\text{C}$
- $R_l=R_s=75\text{ Ohm}$

### Type of package:


F-met.-F

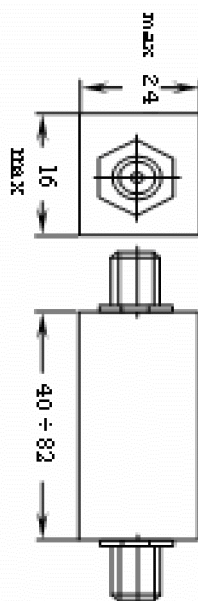

### The basic electrical parameters

Parameter	Unit of meas..	Meaning typ
Nominal frequency	MHz	52,5
Minimum insertion attenuation, not more than	dB	3,0
3- dB bandwidth, not less than	MHz	8
Relative attenuation ( relative to the low channel border) , not less than	dB	
-8 MHz		35
-16 MHz		40
-24 MHz		40
Relative attenuation ( relative to the top channel border), not less than	dB	
+8 MHz		40
+16 MHz		40
+24 MHz		40

### Amplitude-frequency respons

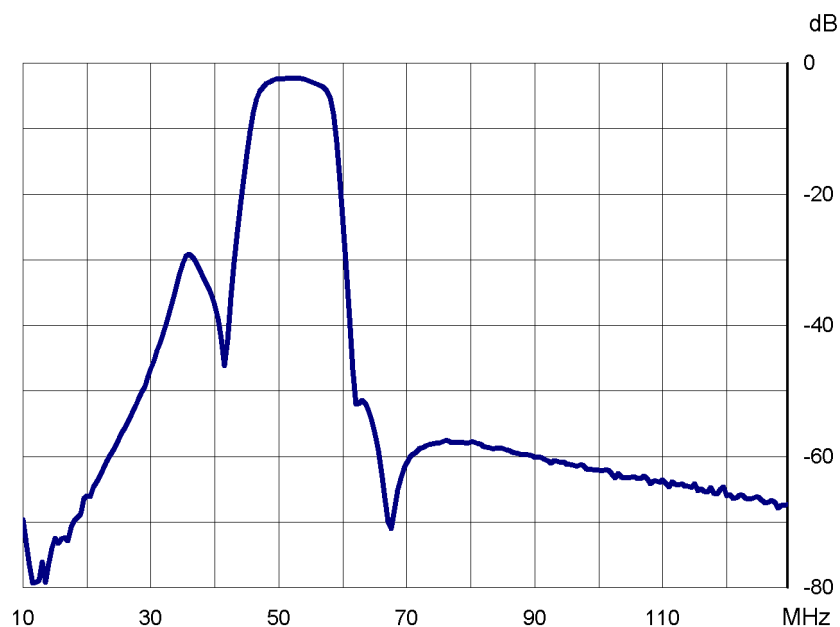

**Manufacturer: BUTIS, Ltd.,**  
**Vereyskaya St. 29, Moscow, 121357 Russia**  
**Tel/fax (095) 411-96-08, 411-96-09**  
**E-Mail: Butis.M@ru.net**