

Bandpass filter ФТКП-СК8

TV channel filter

Application:

- for CATV
- for TV-broadcasting equipment

The mode of measurement:


- $t=25\text{ }^{\circ}\text{C}$
- $R_l=R_s=75\text{ Ohm}$

Type of package:


F-met.-F

The basic electrical parameters

Parameter	Unit of meas..	Meaning typ
Nominal frequency	MHz	170
Minimum insertion attenuation, not more than	dB	8,0
3- dB bandwidth, not less than	MHz	8
Relative attenuation (relative to the low channel border) , not less than	dB	
-8 MHz		30
-16 MHz		40
-24 MHz		40
Relative attenuation (relative to the top channel border), not less than	dB	
+8 MHz		30
+16 MHz		40
+24 MHz		40

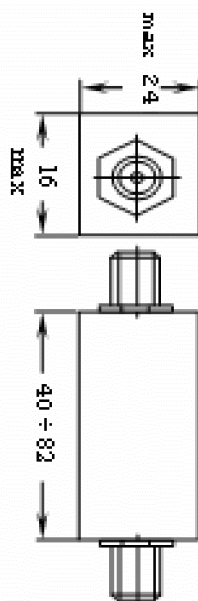

Amplitude-frequency respons

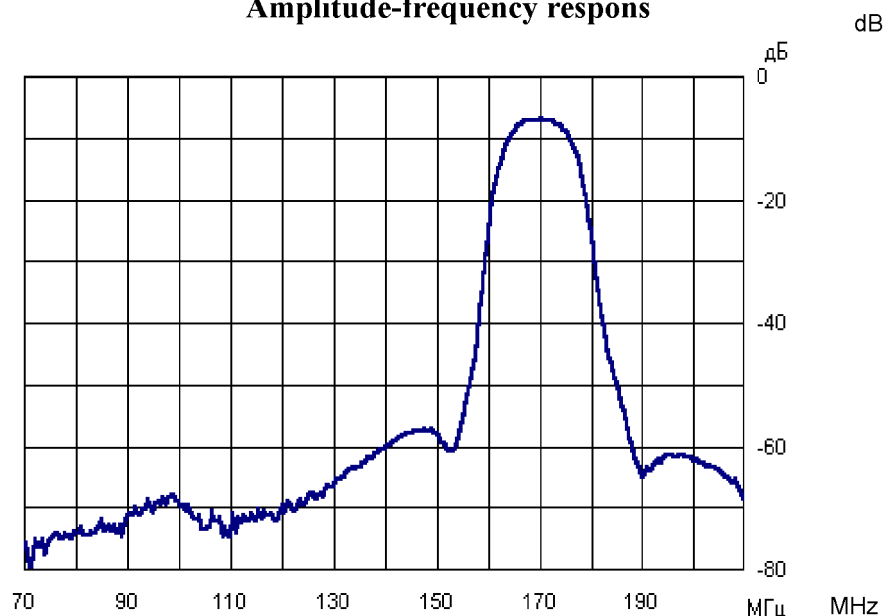

Manufacturer: BUTIS, Ltd.,
 Vereyskaya St. 29, Moscow, 121357 Russia
 Tel/fax (495) 411-96-08, 411-96-09
 E-Mail: Butis.M@ru.net