

SAW Filter ФП3П7-508-9

Application:

Transmitting and receiving equipments

Measuring conditions:

- $t=25\text{ }^{\circ}\text{C}$
- $R_{\text{source}}=R_{\text{load}}=50\ \Omega$

Metal package: DIP 4K


Pin configuration:

- 1 – input;
- 3 – output;
- 2,4 – ground


Main Electrical Parameters

Parameter	Unit	Typ. value
Center frequency	MHz	125
Insertion loss	dB	18,5
3 dB bandwidth	MHz	34,1
40 dB bandwidth	MHz	42,5
Relative attenuation	dB	40
Temperature coefficient of frequency	ppm	-72

Frequency Response

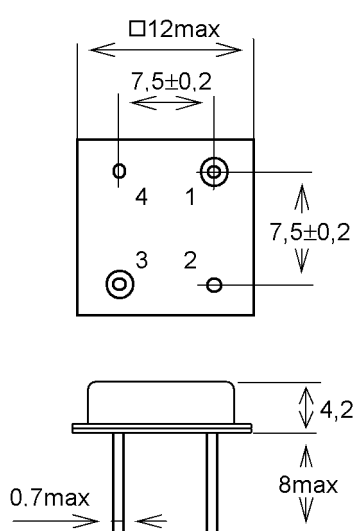

Dimensions in mm

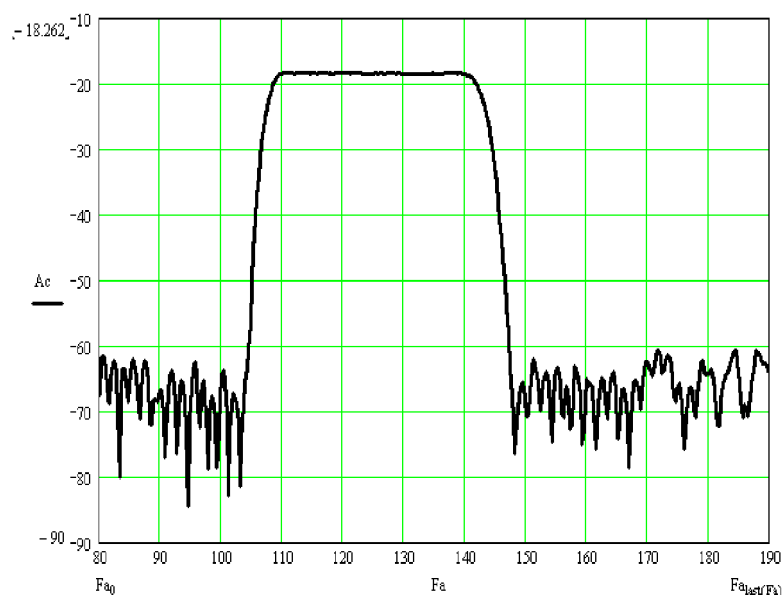

dB

MHz

Manufacturer: "BUTIS" Ltd.

121357, Russia, Moscow, Vereyskaya, 29

Tel/fax (495) 411-96-08, 411-96-09

E-Mail: Butis.M@ru.net

<http://www.butis-m.ru>