

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	0	-	50
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	160.0	-
Insertion Loss at Fo	dB	-	18.5	22.0
Group Delay Variation (Fo±4.425 MHz)	nsec	-	62	100
Absolute Delay	µsec	-	1.45	-
Passband Ripple (Fo±4.425 MHz)	dB	-	0.35	0.9
Bandwidth at -1.0 dB	MHz	8.85	10.07	-
Bandwidth at -3.0 dB	MHz	-	10.6	-
Bandwidth at -40.0 dB	MHz	-	12.8	13.4
Relative Attenuation				
Lower Sidelobe	dB	40	45	-
Upper Sidelobe	dB	40	45	-
Temperature Coefficient	ppm/°C	-	-20	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

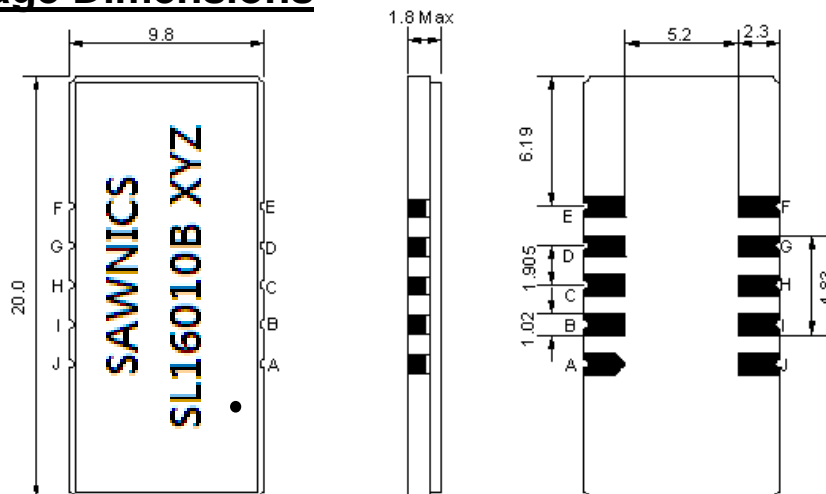

- ① SAWNICs: Brand
- ② SL16010B: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output


Testing Environment

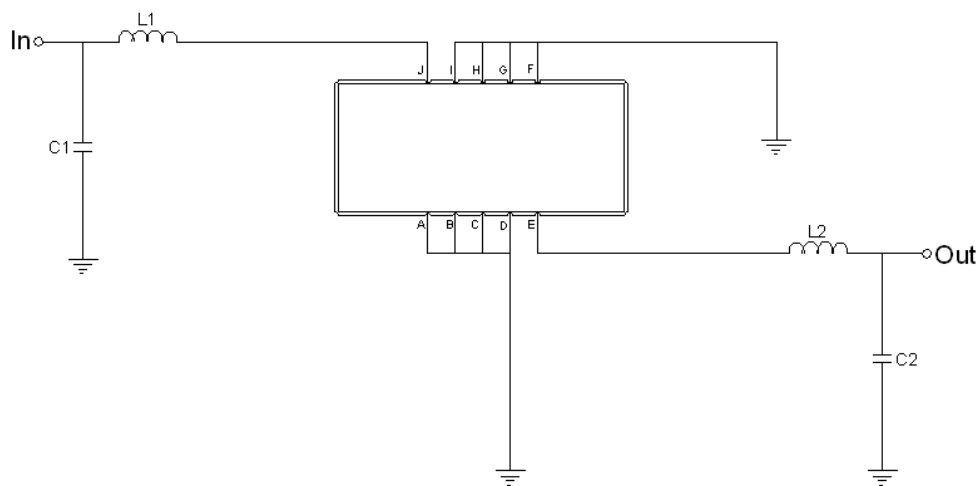


Test Fixture & Values	
Input	L1=33nH, C1=36pF
Output	L2=27nH, C2=53pF
Source/Load Impedance	50 Ω

Frequency Response


Bandwidth at -1.0 dB

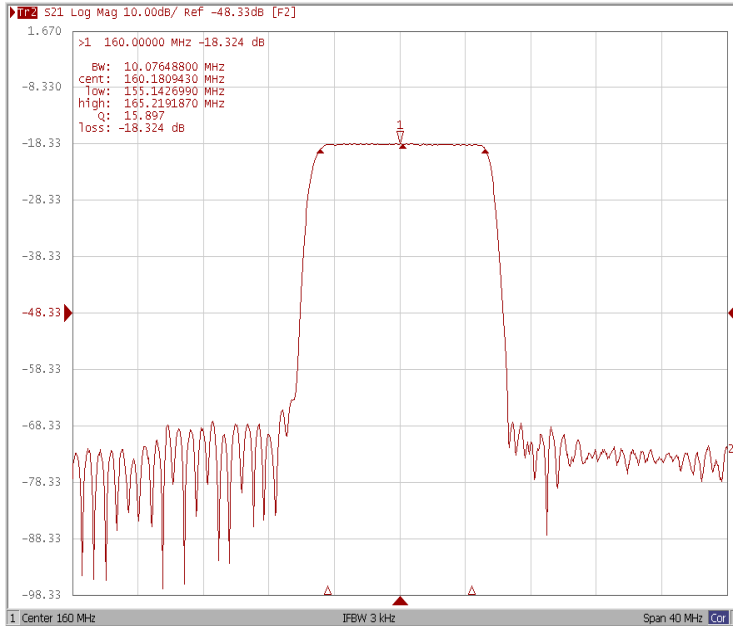


Bandwidth at -3.0 dB

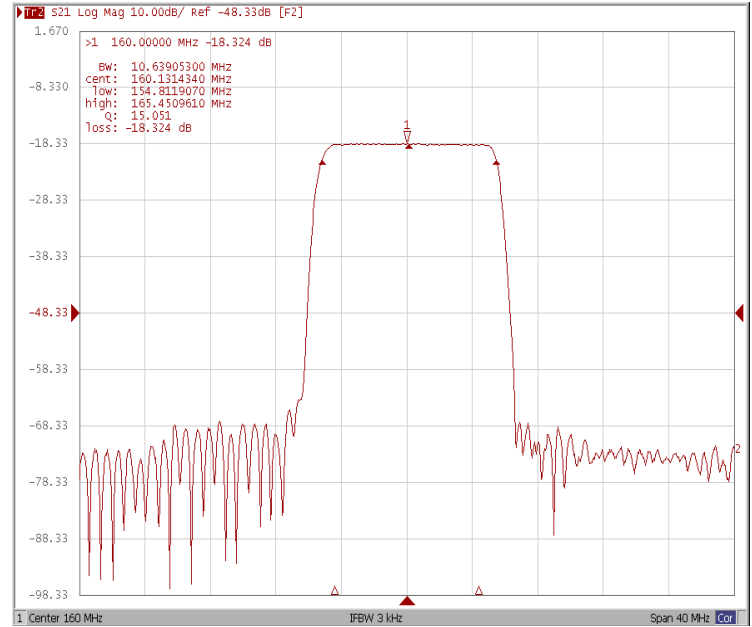

Bandwidth at -40.0dB

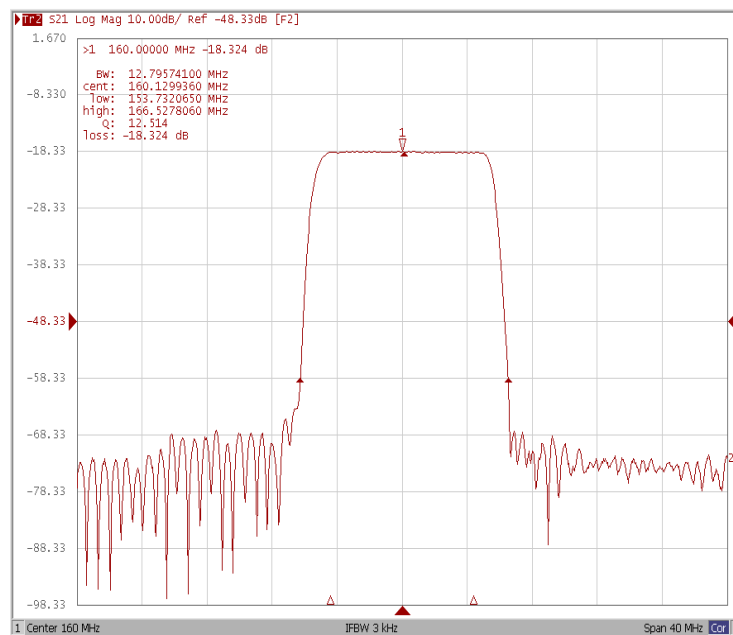


Wide Band

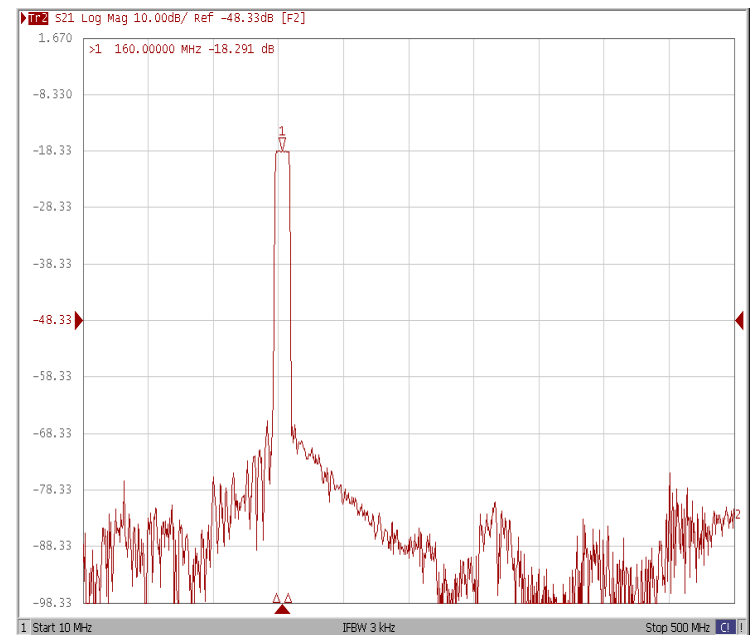


Frequency Response


Ripple Variation (Fo±4.425 MHz)

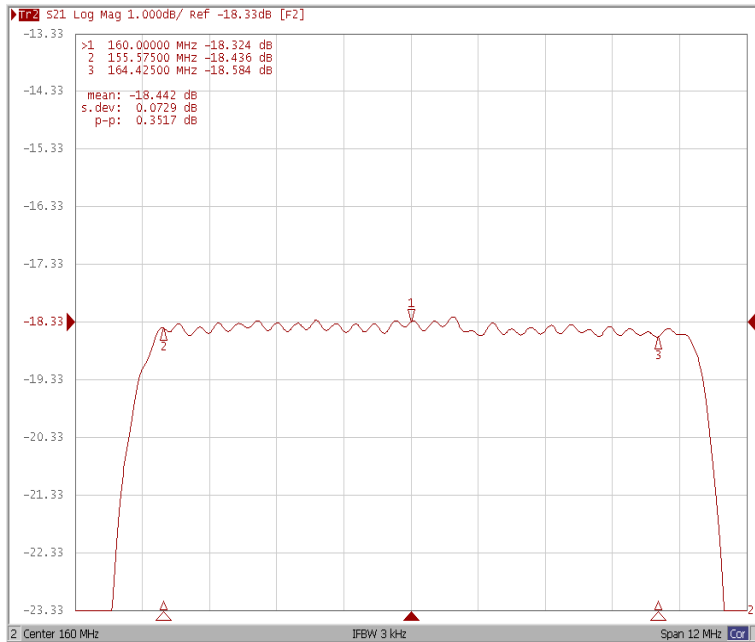

Group Delay Variation (Fo±4.425 MHz)

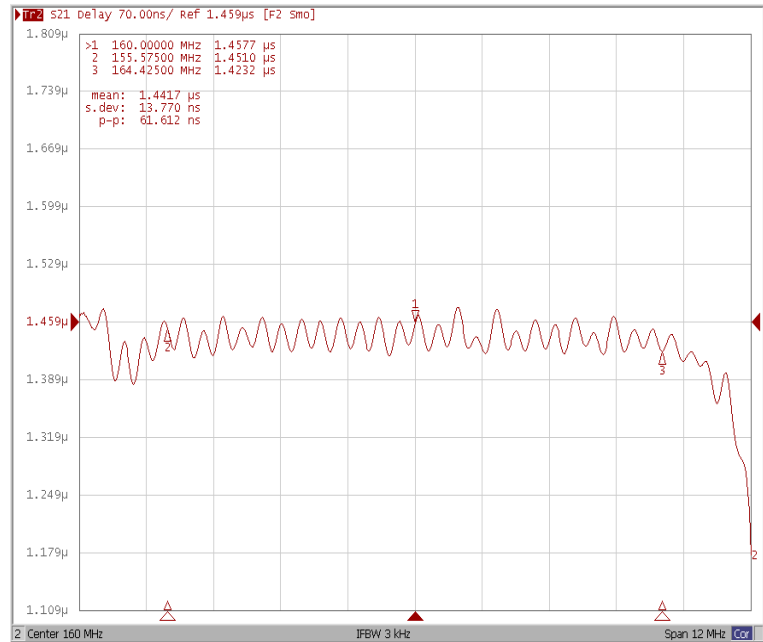

Smith Chart

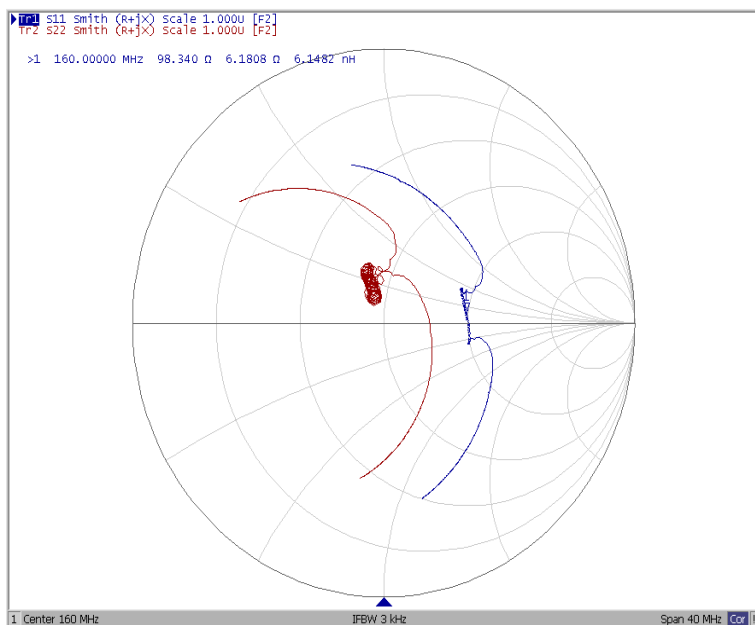

VSWR

