

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	S1			
Length x Width	mm ²	-	7.0 x 5.0	-
Height	mm	-	-	1.8


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	173.80	174.00	174.20
Insertion Loss at Fo	dB	-	13.97	16.0
Amplitude Ripple Variation at Fo \pm 3.9 MHz	dB _{p-p}	-	0.30	0.8
Group Delay Variation at Fo \pm 3.9 MHz	nsec	-	30	80
Absolute Delay at Fo	μ sec	-	0.73	-
Temperature Coefficient	ppm/°C	-	-18	-
Bandwidth at -1.0 dB	MHz	10.00	10.50	-
Bandwidth at -3.0 dB	MHz	-	11.50	-
Bandwidth at -40.0 dB	MHz	-	15.60	16.00
Relative Attenuation				
Lower Sidelobe	dB	40	47	-
Upper Sidelobe	dB	40	47	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

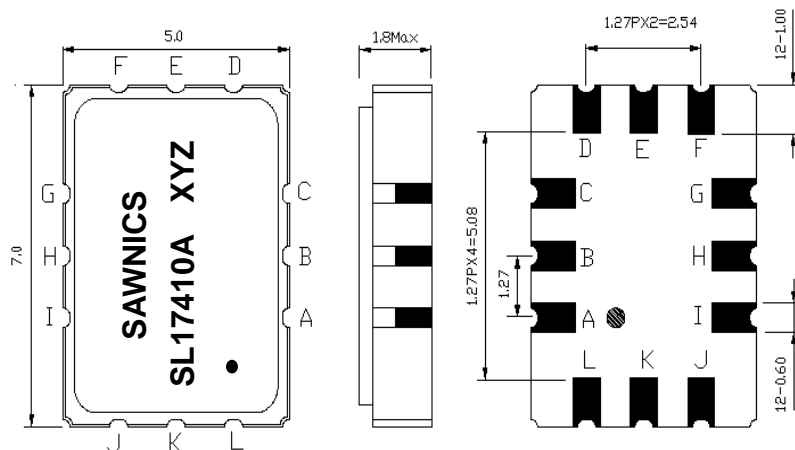

- ① SAWNICS: Brand
- ② SL17410A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A,B,C,D,F,G,H,I,L	Ground
K	Input
E	Output


Testing Environment

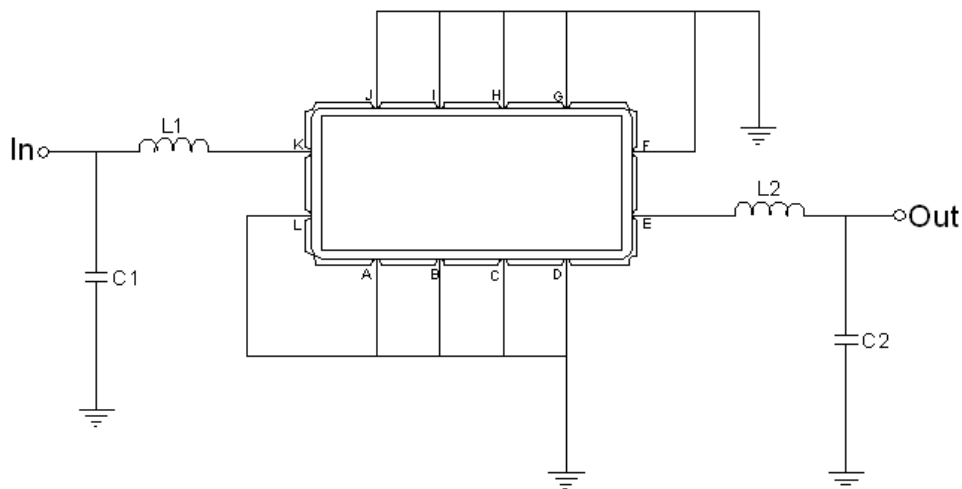

Test Fixture & Values	
Input	L1=56 nH , C1=36 pF
Output	L1=56 nH , C2=36 pF
Source/Load Impedance	50 Ω

Frequency Response


Bandwidth at -1.0 dB

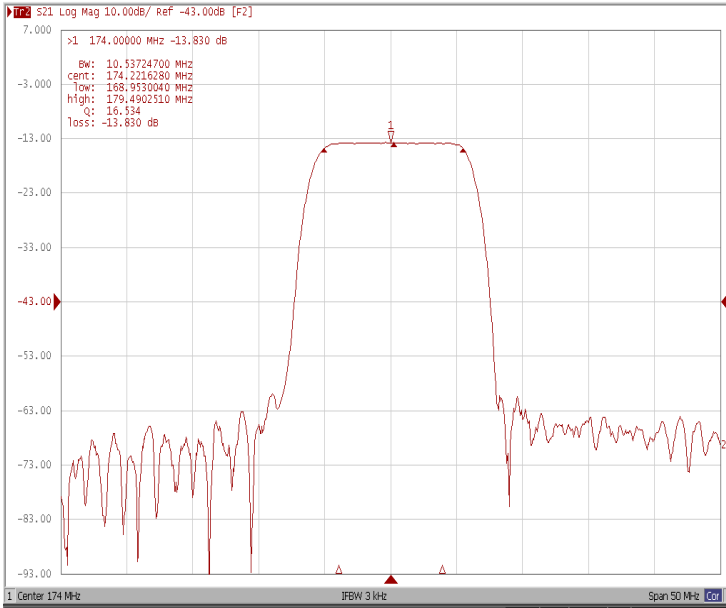


Bandwidth at -3.0 dB



Bandwidth at -40.0 dB

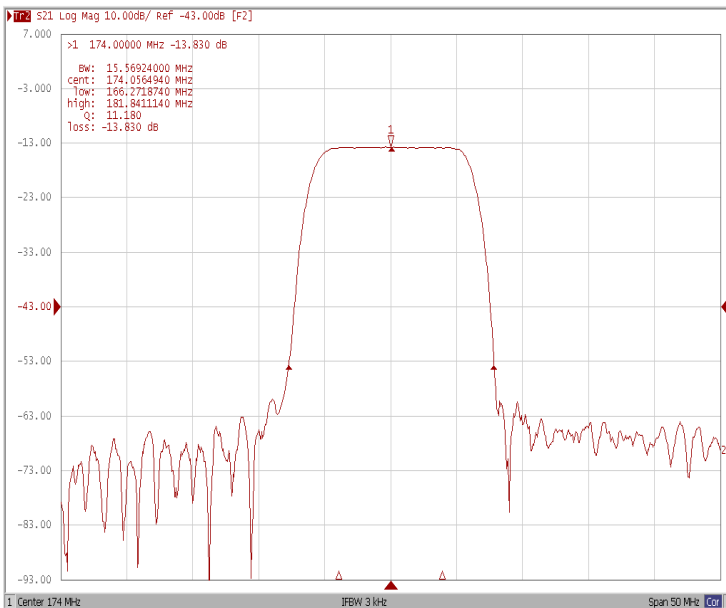


Wide-Band

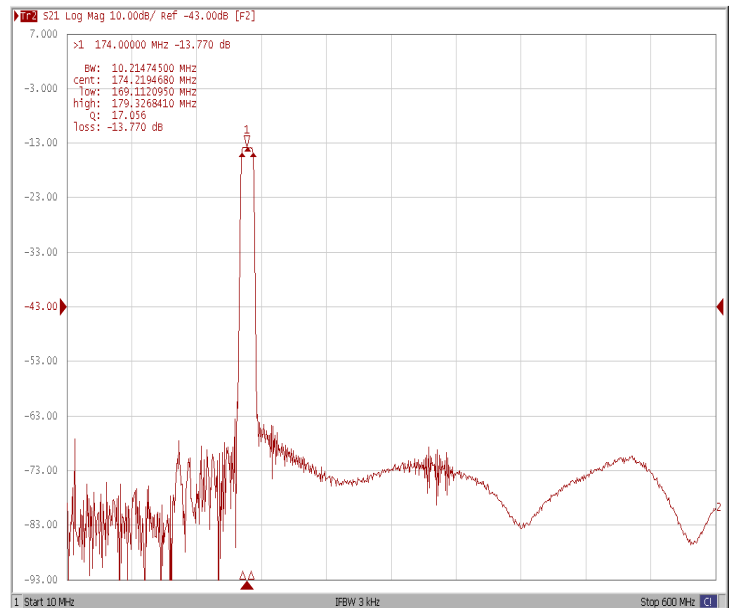


Frequency Response


Ripple Variation Fo±3.9MHz

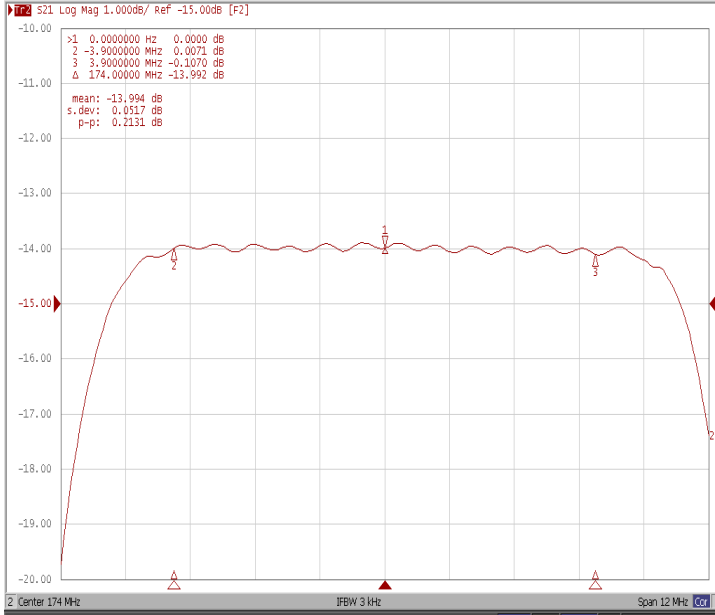

Group Delay Variation Fo±3.9MHz

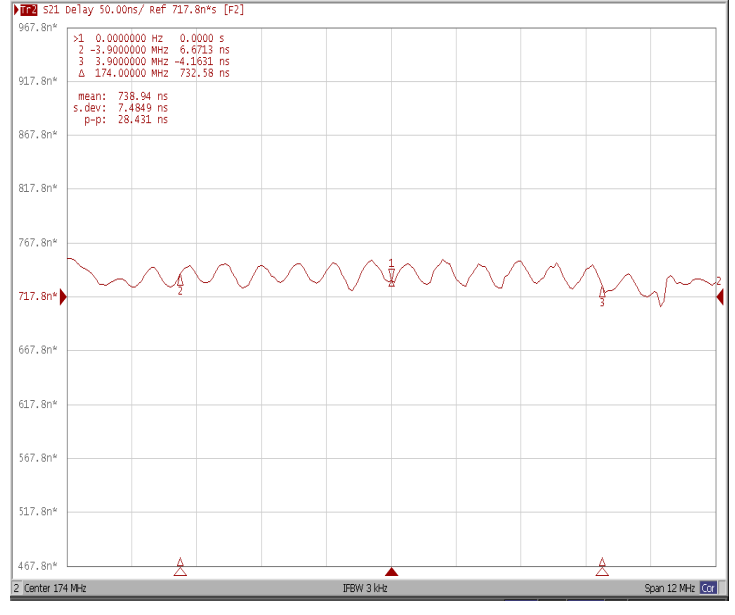

Smith Chart

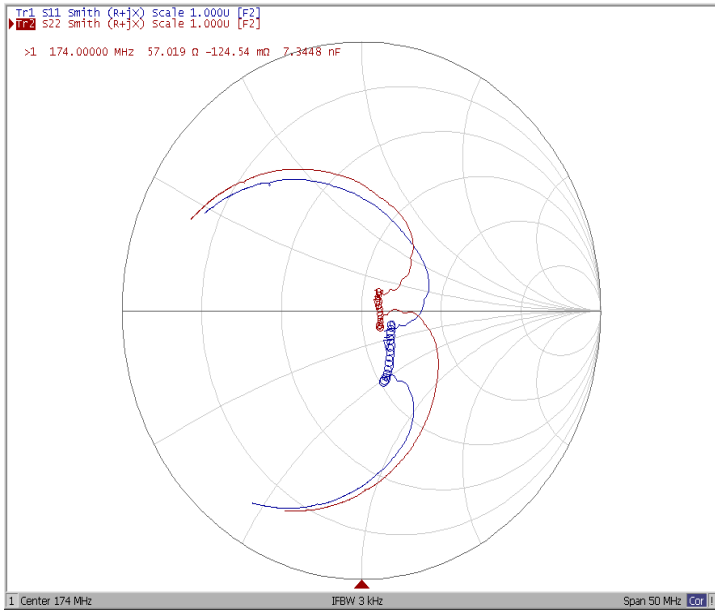

SWR

