

## Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-5	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	D1			
Length x Width	mm <sup>2</sup>	-	20.0 x 9.8	-
Height	mm	-	-	1.8


## Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	180.0	-
Insertion Loss at Fo	dB	-	12.5	15.0
Group Delay Variation at Fo ± 7.5 MHz	nsec	-	20	60
Absolute Delay at Fo	usec	-	0.79	
Passband Ripple Variation at Fo ± 7.5MHz	dB	-	0.3	0.8
Bandwidth at -1dB	MHz	16.80	17.08	-
Bandwidth at -3dB	MHz	-	18.05	-
Bandwidth at -40dB	MHz	-	21.80	22.30
Ultimate Rejection	dB	40	45	-
Temperature Coefficient	ppm/°C	-	-86	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


## Package Dimensions

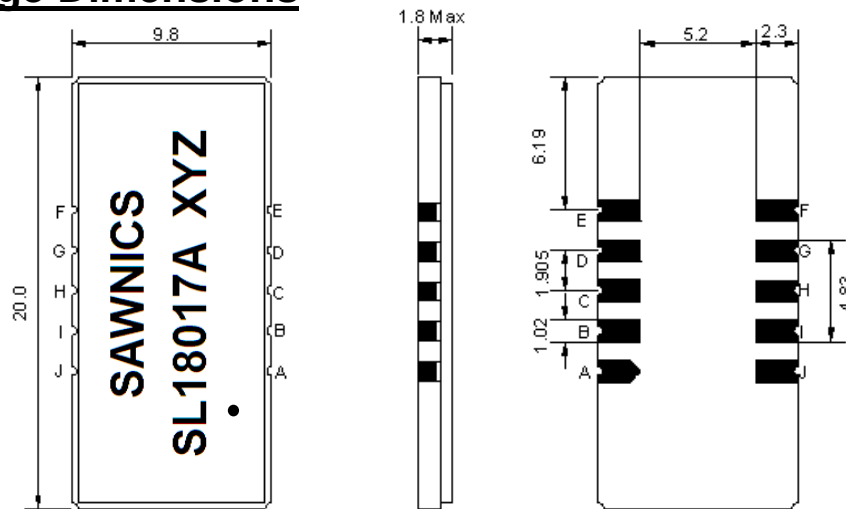

- ① SAWNICS: Brand
- ② SL18017A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output


## Testing Environment

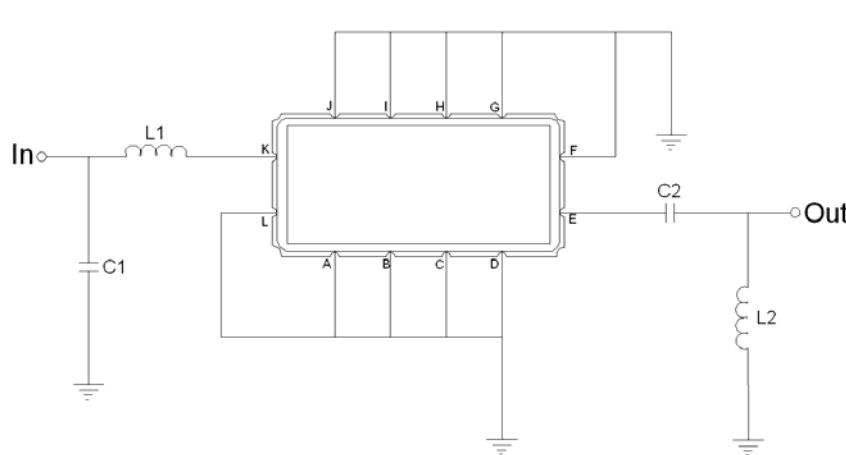


Test Fixture & Values	
Input	L1 = 22 nH, C1 = 12 pF
Output	L2 = 47 nH, C2 = 100 pF
Source/Load Impedance	50 $\Omega$

## Frequency Response


### Bandwidth at -1.0 dB

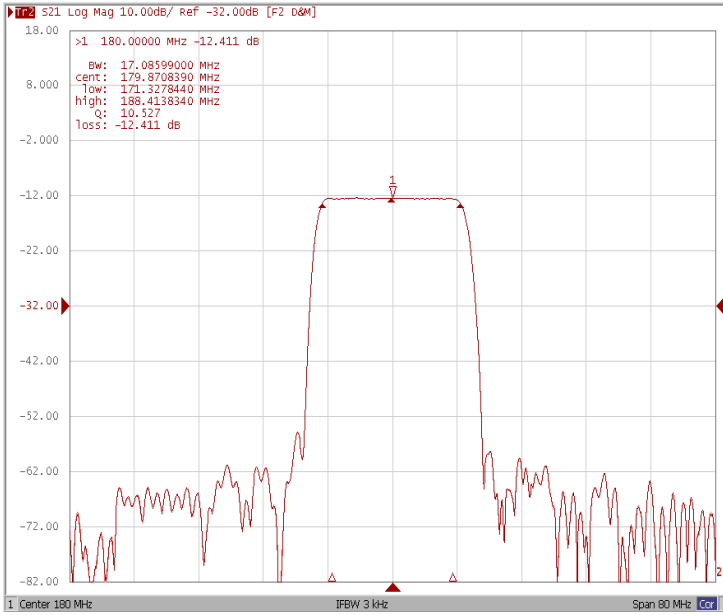


### Bandwidth at -3.0 dB

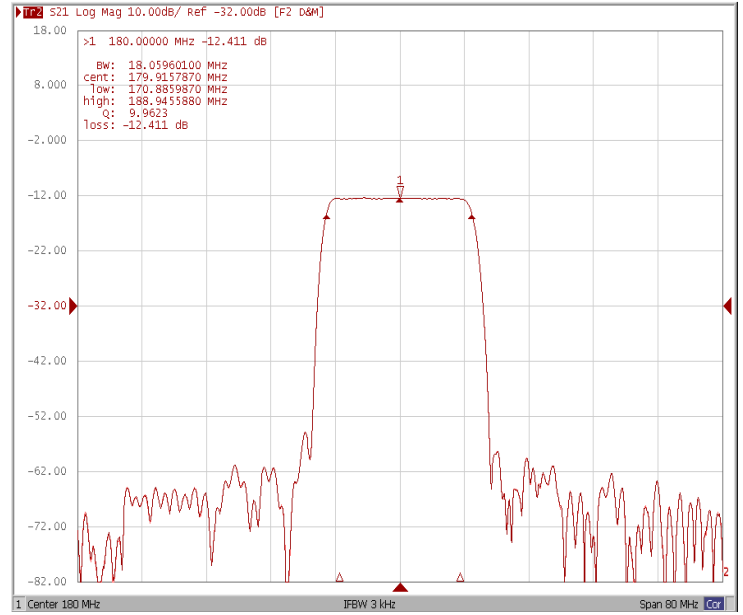

### Bandwidth at -40.0 dB

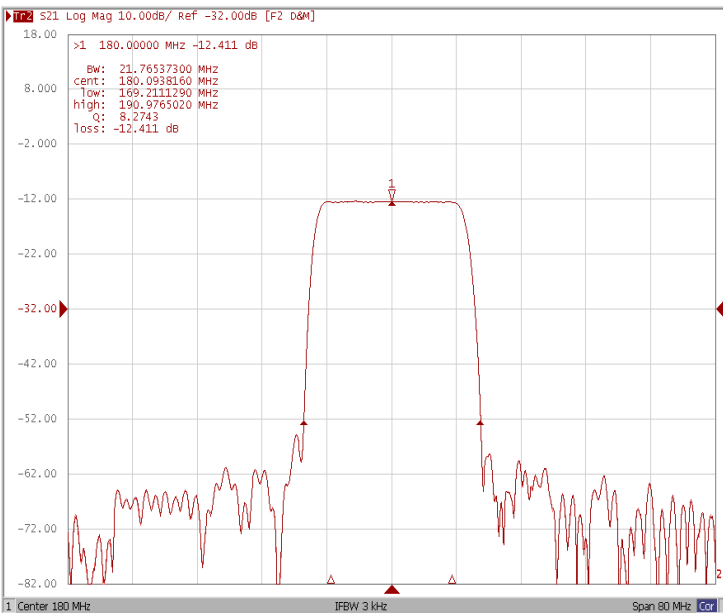


### Wide-Band

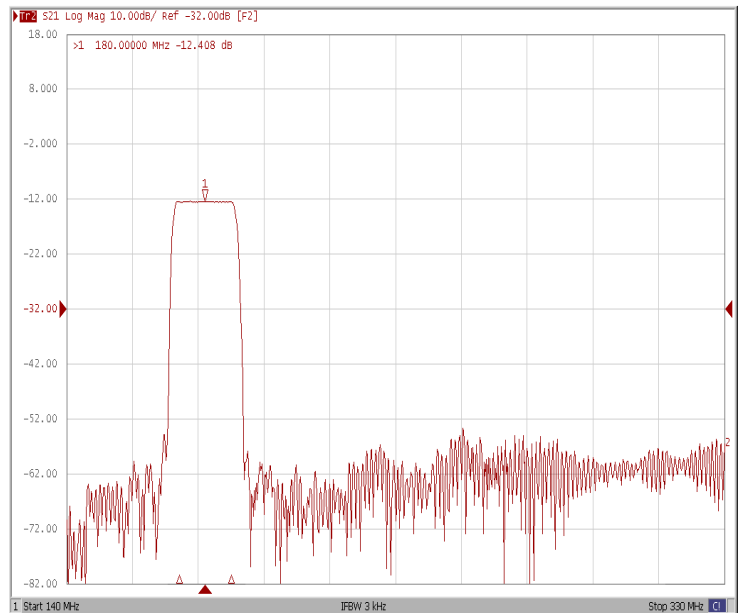


## Frequency Response


### Ripple Variation Fo±7.50 MHz

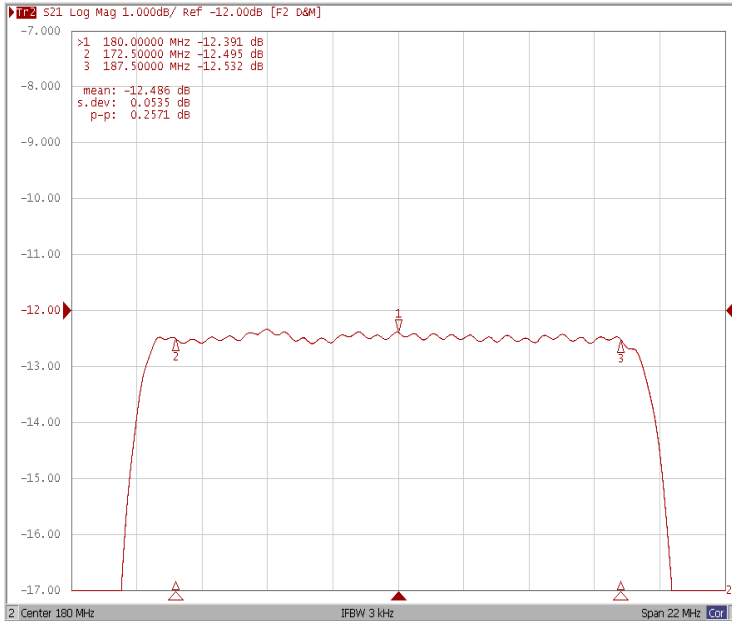

### Group Delay Variation Fo±7.50MHz

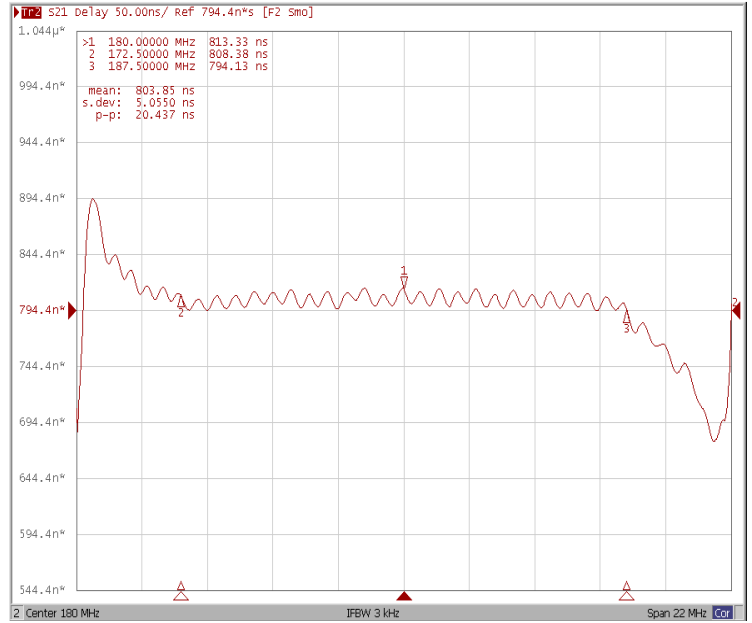

### Smith Chart

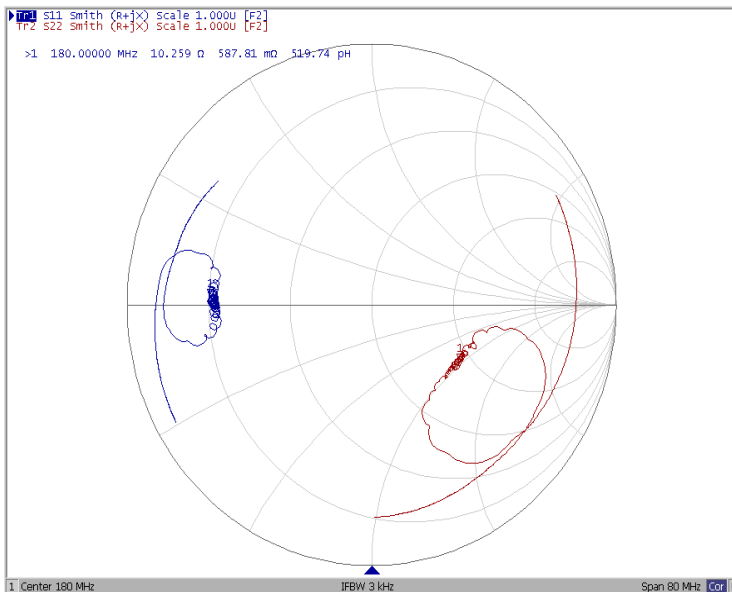

### VSWR

