

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-5	-	60
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	264.00	-
Insertion Loss at Fo	dB	-	29.50	31.50
Group Delay Variation at Fo ± 12.50 MHz	nsec	-	27	60
Absolute Delay at Fo	usec	-	2.02	-
Passband Ripple Variation at Fo ± 12.50 MHz	dB	-	0.70	1.10
Bandwidth at -1dB	MHz	25.60	25.93	-
Bandwidth at -3dB	MHz	-	26.37	-
Bandwidth at -40dB	MHz	-	28.25	28.50
Ultimate Rejection	dB	48	52	-
Temperature Coefficient	ppm/°C	-	-20	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

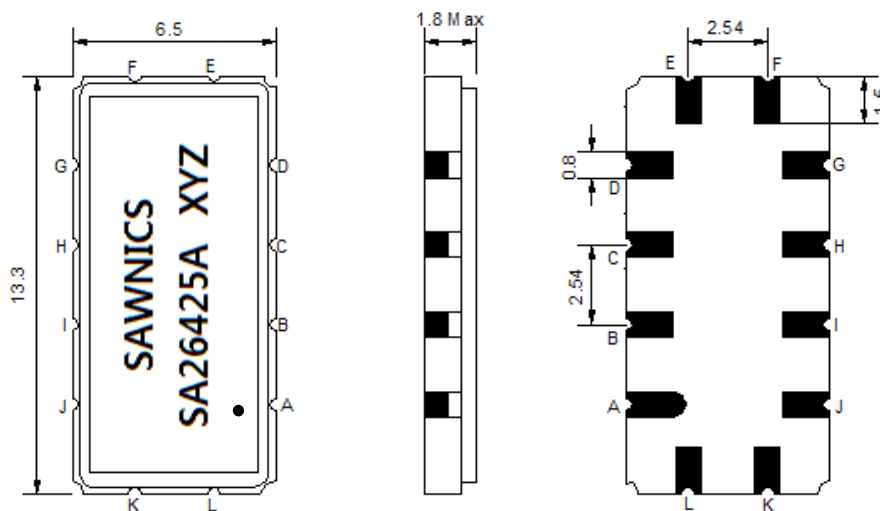

- ① SAWNICS: Brand
- ② SA26425: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

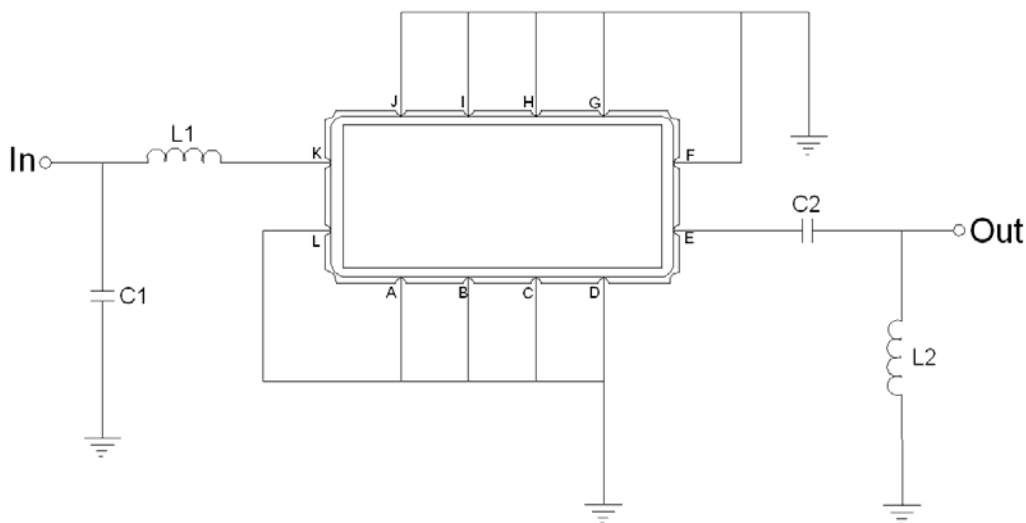


Test Fixture & Values	
Input	L1 = 12 nH, C1 = 43 pF
Output	L2 = 8.2 nH, C2 = 56 pF
Source/Load Impedance	50 Ω


Frequency Response

*Room Temp. 25 degree


Bandwidth at -1.0 dB

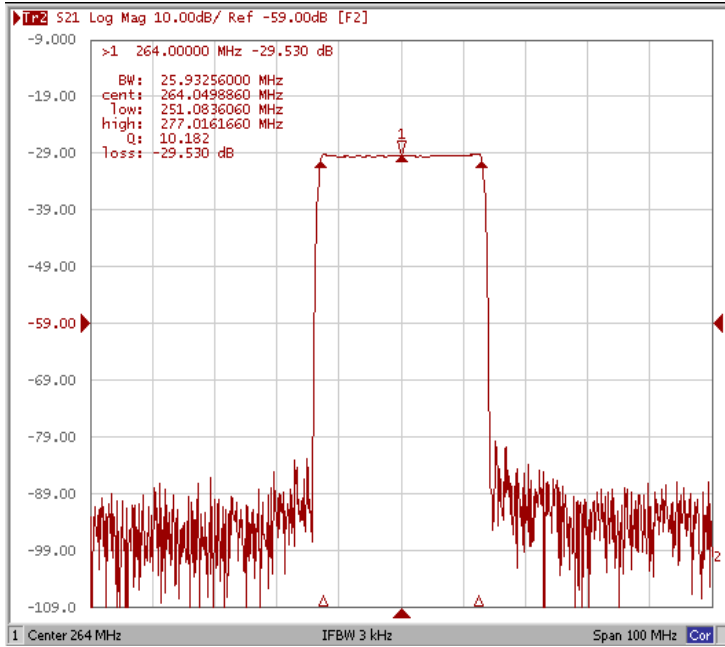


Bandwidth at -3.0 dB

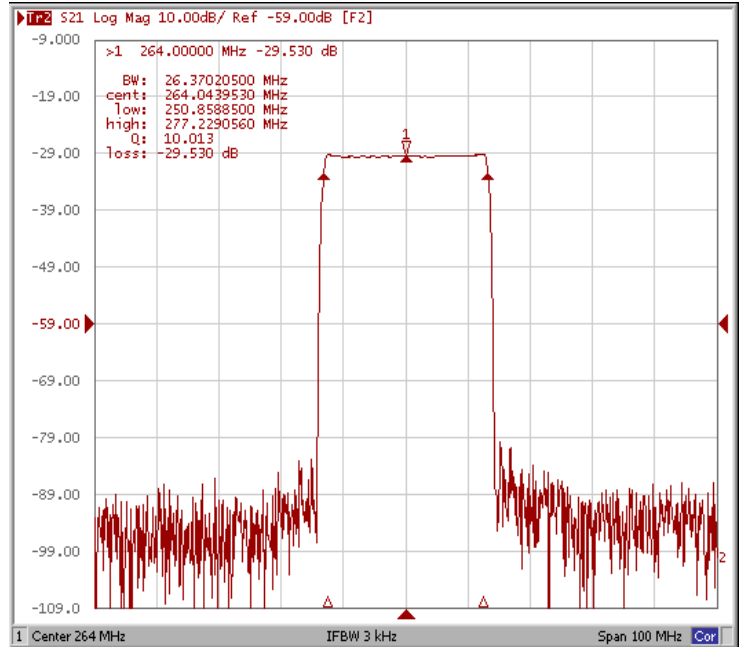

Bandwidth at -40 dB

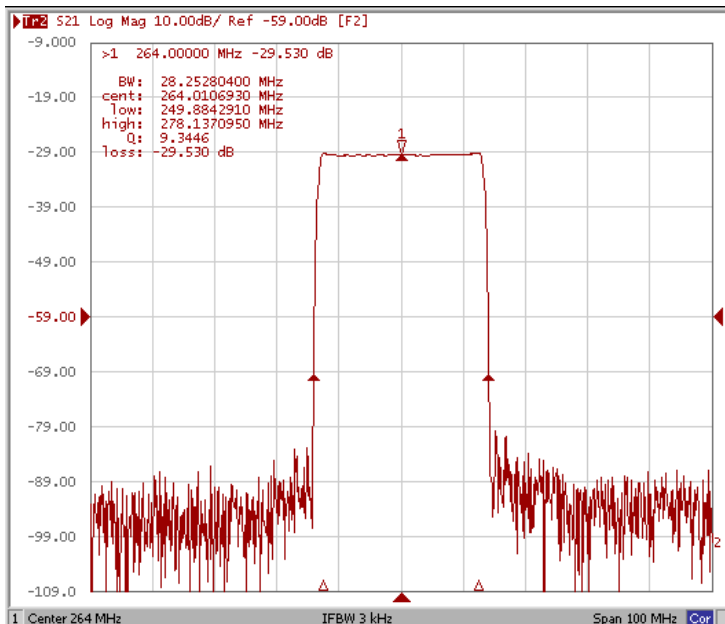


Wide-Band

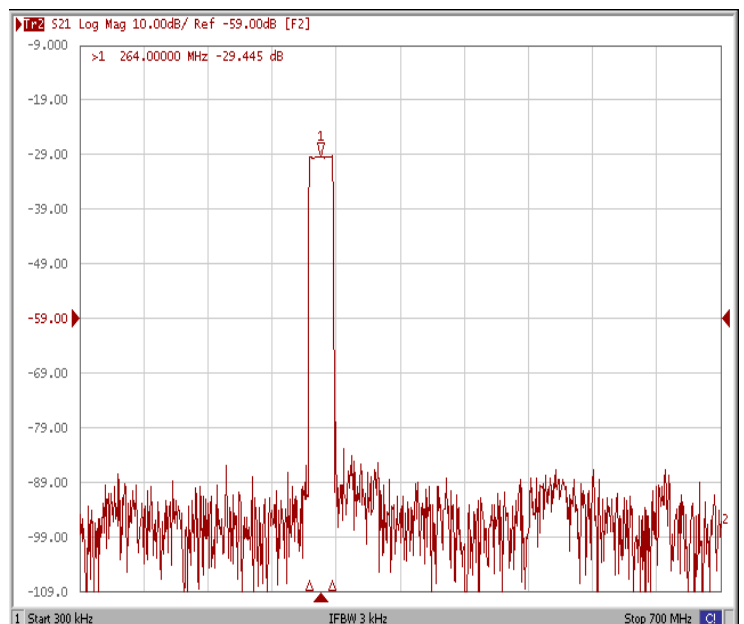


Frequency Response

*Room Temp. 25 degree


Ripple Variation $F_{o\pm 12.5}$ MHz

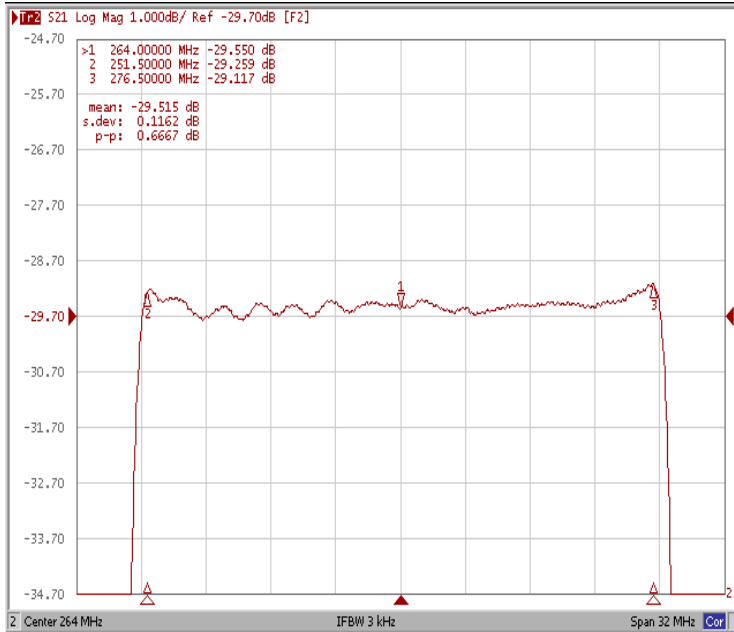

Group Delay Variation $F_{o\pm 12.5}$ MHz

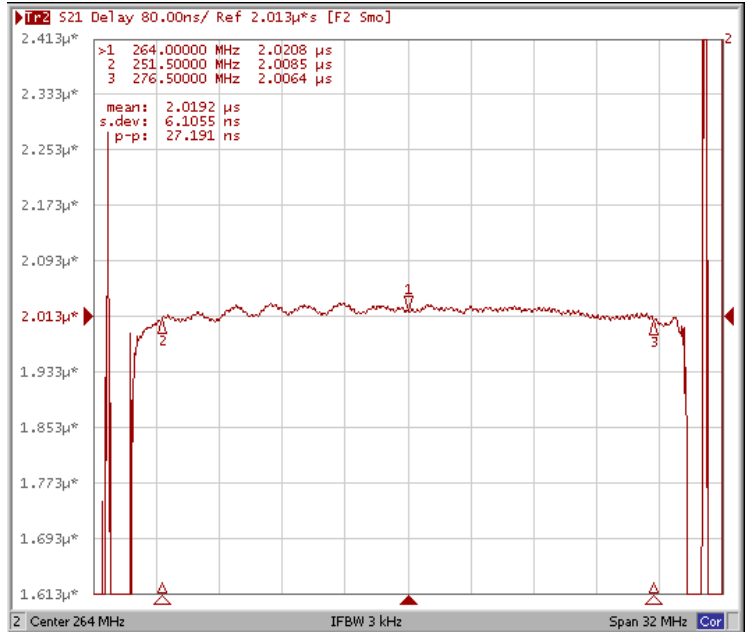

Smith Chart

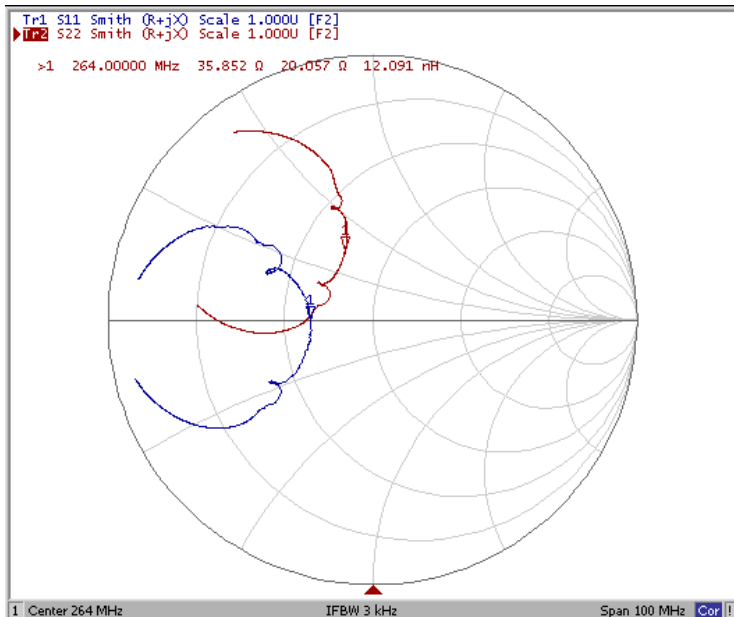

VSWR

