

## Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (Single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (Single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	V			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8


## Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	379.80	380.0	380.20
Insertion Loss at Fo	dB	-	20.5	23.0
Amplitude Ripple Variation	dB <sub>p-p</sub>	-	0.55	1.0
Group Delay Variation	nsec	-	85	150
Phase Linearity Variation	deg	-	5.2	10.0
Absolute Delay at Fo	μsec	-	1.45	-
Temperature Coefficient	ppm/°C	-	-0.03	-
Bandwidth at -1.0 dB	MHz	4.0	4.10	-
Bandwidth at -3.0 dB	MHz	4.3	4.57	-
Bandwidth at -40.0 dB	MHz	-	6.20	6.50
<b>Relative Attenuation:</b>				
Lower Sidelobe	dB	45	50	-
Upper Sidelobe	dB	45	50	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


# Package Dimensions

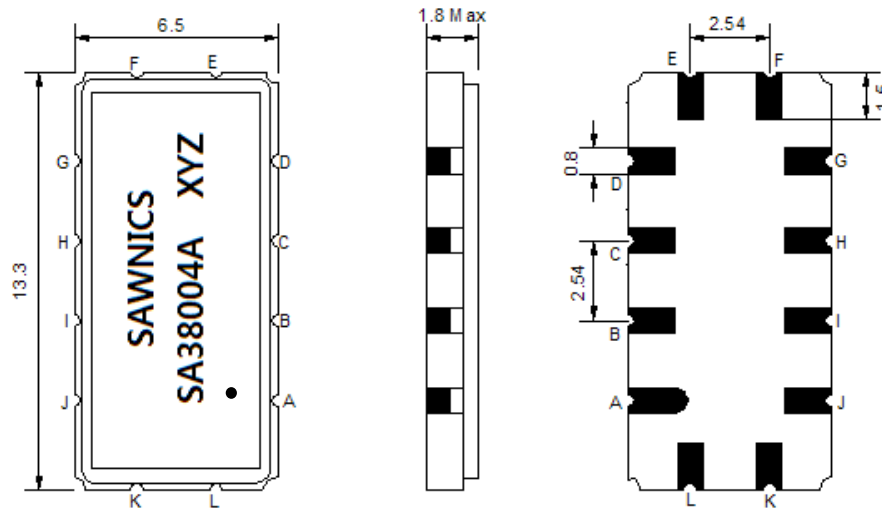

- ① SAWNICs: Brand
- ② SA38004A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output


# Testing Environment

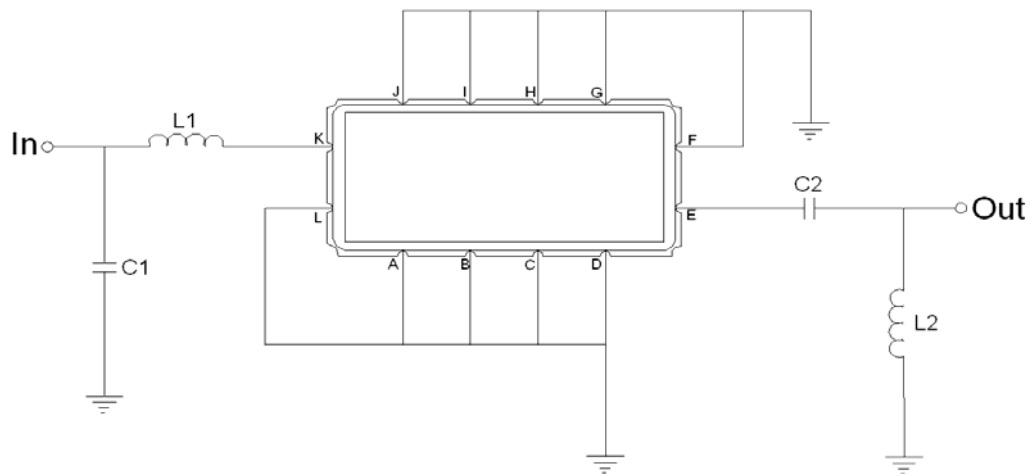


Test Fixture & Values	
Input	L1=5.6nH , C1=22pF
Output	L2=22nH , C2=5.6pF
Source/Load Impedance	50 Ω

## Frequency Response


### Bandwidth at -1.0 dB

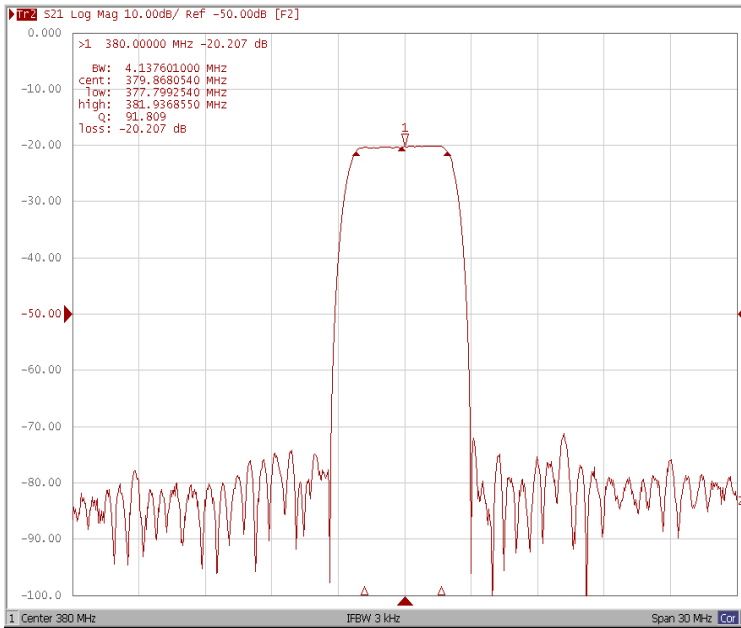


### Bandwidth at -3.0 dB

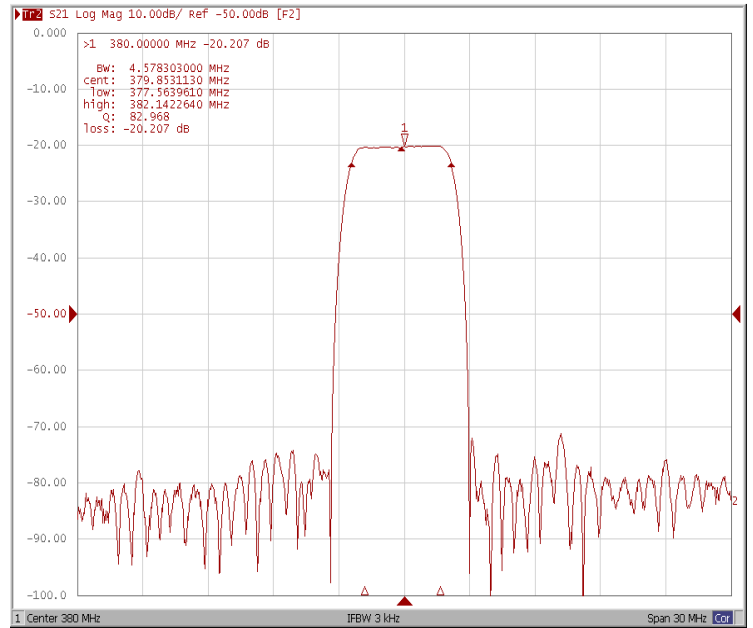

### Bandwidth at -40.0 dB

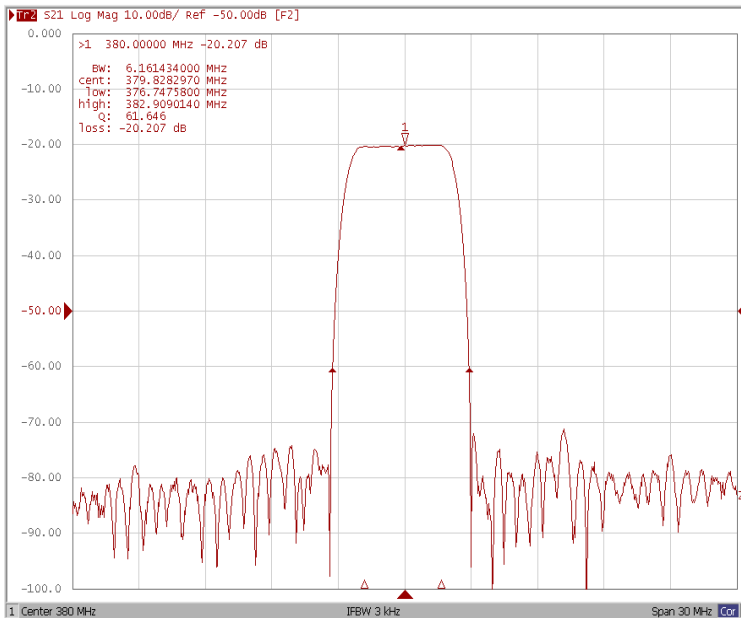


### Wide-Band

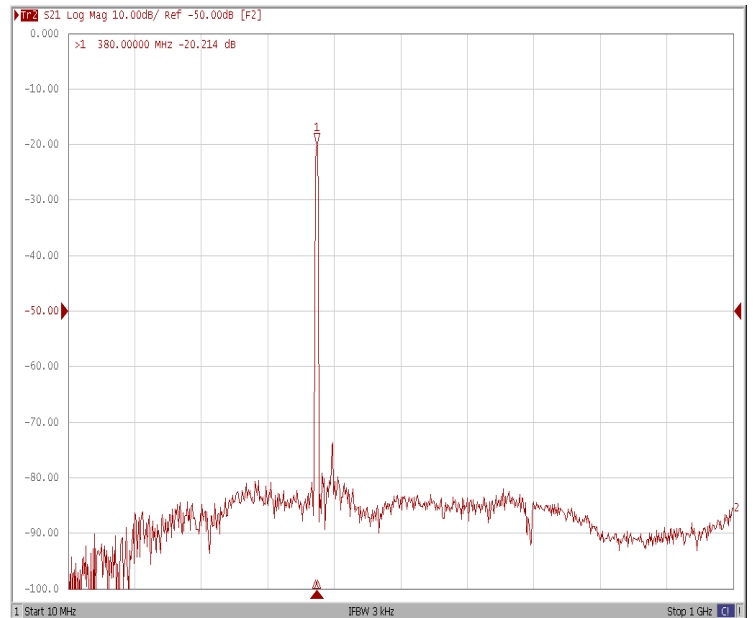


## Frequency Response


### Ripple Variation Fo±1.8MHz

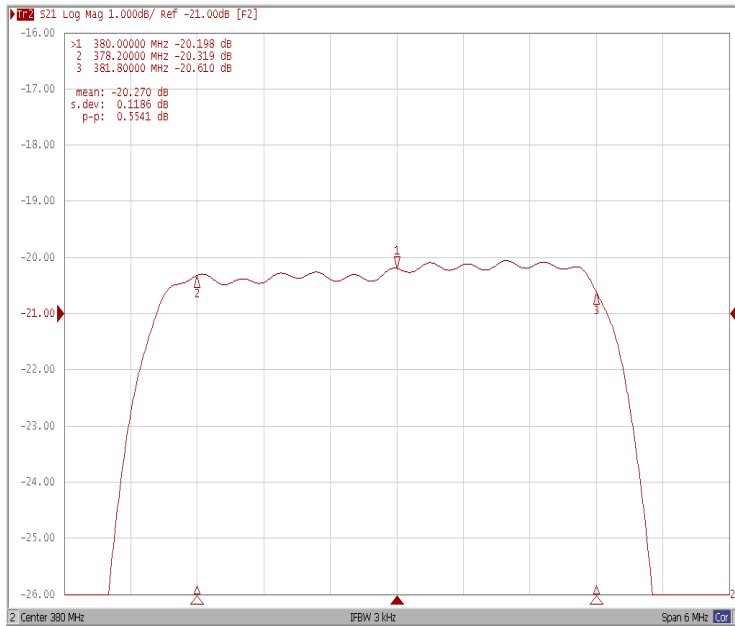

### Group Delay Variation Fo±1.8MHz

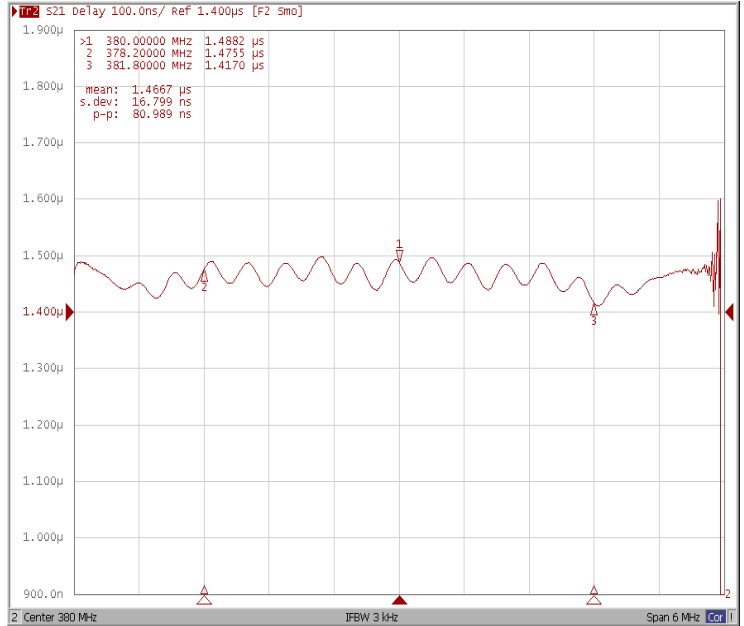

### Smith Chart

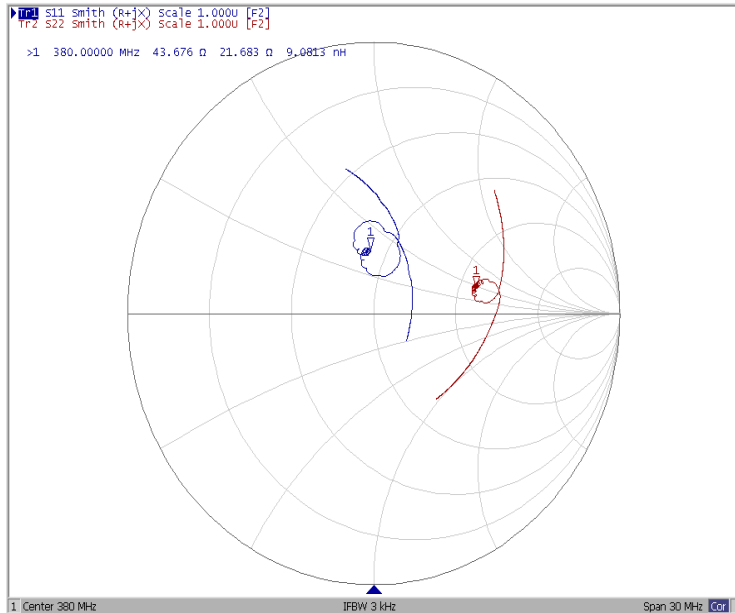

### Phase Linearity Variation Fo±1.8MHz

