

□ Electrical Characteristics

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8


Electrical Specification

Center Frequency (Fo)	MHz	-	62.5	-
Insertion Loss at Fo	dB	-	23.8	25.0
Group Delay Variation (Fo±6.92MHz)	ns	-	30	80
Absolute Delay Time at Fo	us	-	1.7	-
Temperature Coefficient	ppm/°C	-	-72	-
Amplitude Ripple (Fo±6.92MHz)	dB	-	0.5	1.0
Bandwidth at -1dB	MHz	14.60	14.80	-
Bandwidth at -3dB	MHz	-	15.30	-
Bandwidth at -40dB	MHz	-	17.30	17.50
Relative Attenuation				
Fo±8.5MHz	dB	20	25	
Lower sidelobe	dB	40	47	-
Upper sidelobe	dB	40	47	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

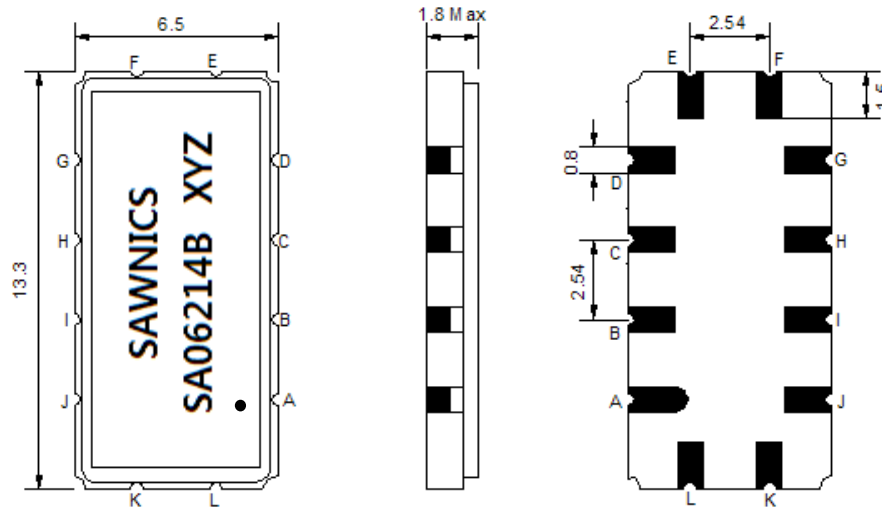

- ① SAWNICS: Brand
- ② SA06214B: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output


Testing Environment

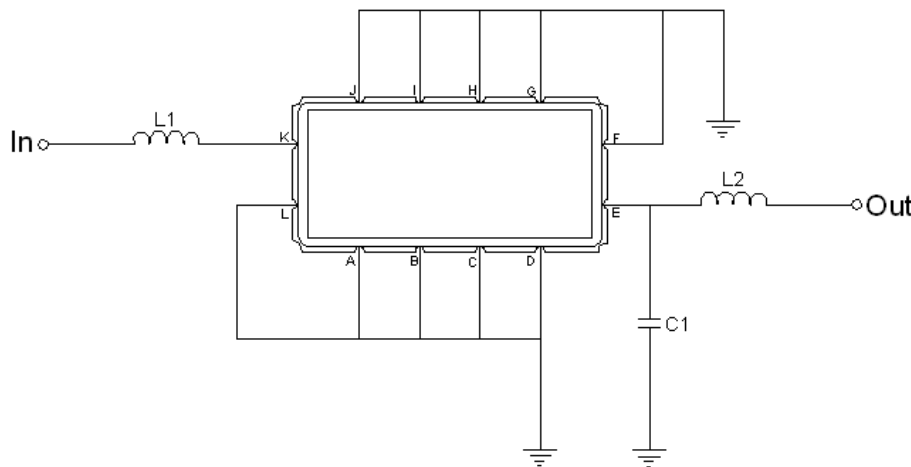


Test Fixture & Values	
Input	L1=220 nH
Output	L2=220 nH, C1=15pF
Source/Load Impedance	50 Ω

Frequency Response


Bandwidth at -1.0 dB

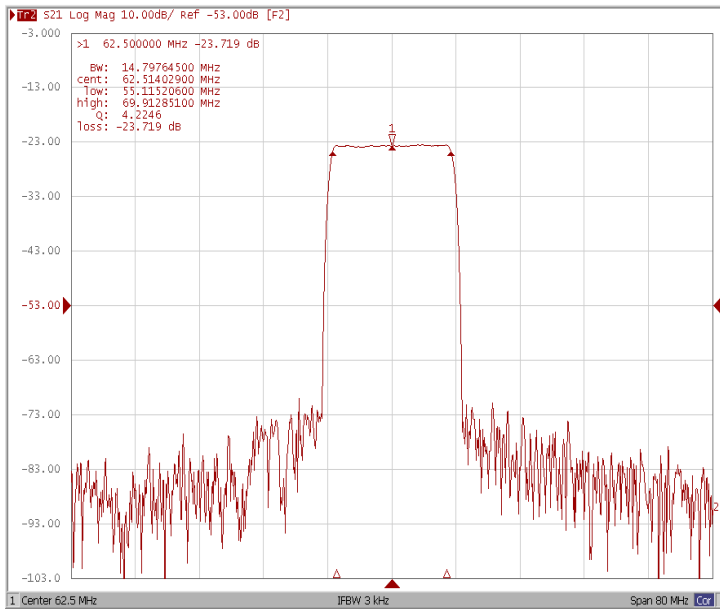


Bandwidth at -3.0 dB

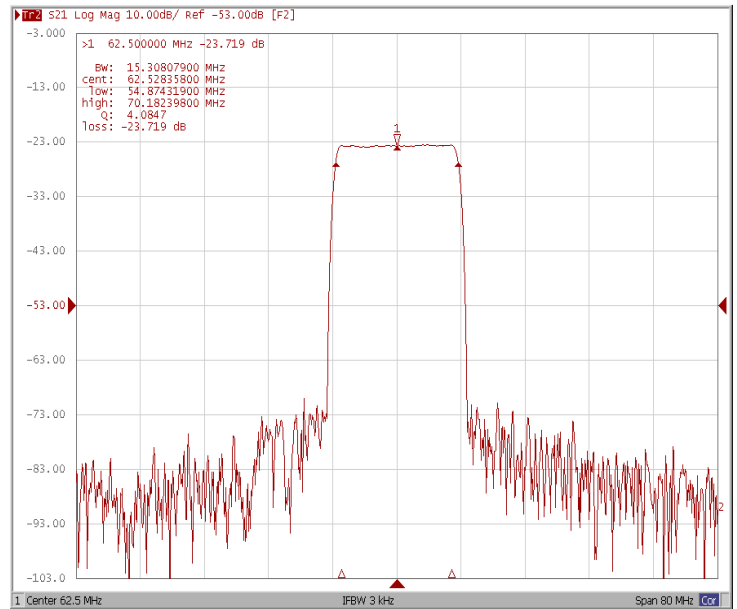

Bandwidth at -40.0 dB

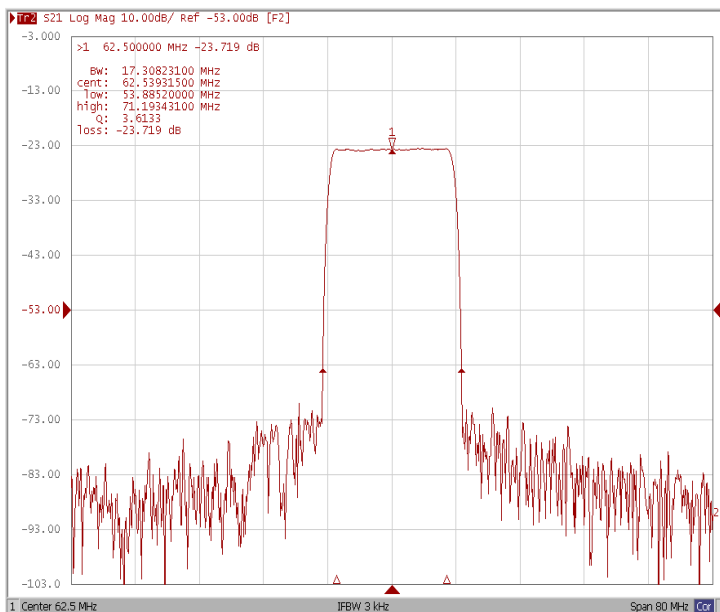

Attenuation Fo ±8.5MHz

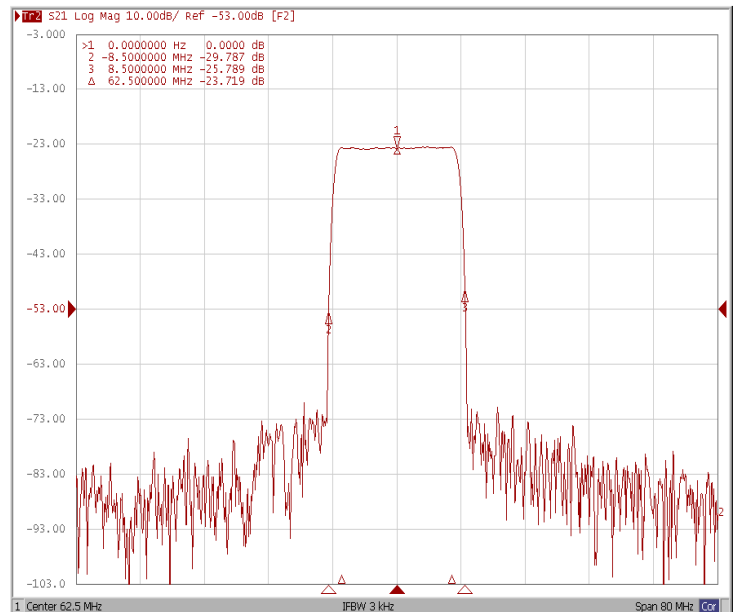


Frequency Response


Ripple Variation Fo±6.92MHz



Group Delay Variation Fo±6.92MHz

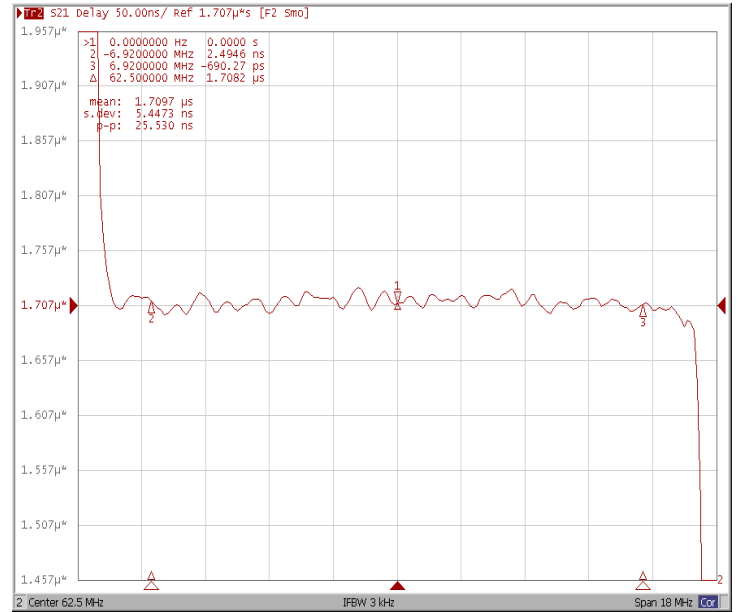

Smith Chart

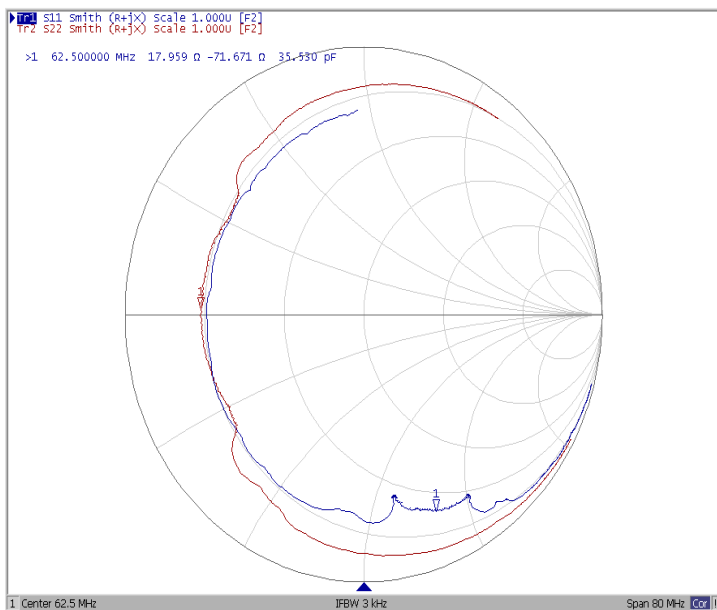

VSWR

