

**Maximum Ratings**


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	D1			
Length x Width	mm <sup>2</sup>	-	20.0 x 9.8	-
Height	mm	-	-	1.8

**Electrical Specification**

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	105.41	105.51	105.61
Insertion Loss at Fo	dB	-	22.00	23.00
Group Delay Variation	ns	-	40	100
Absolute Delay at Fo	us	-	2.28	-
Passband Ripple Variation	dB	-	0.55	0.95
Bandwidth at -1dB	MHz	-	14.18	-
Bandwidth at -3dB	MHz	14.40	14.50	-
Bandwidth at -50dB	MHz	-	15.88	16.00
Ultimate Rejection	dB	50	53	-
Temperature coefficient	ppm/°C	-	-72	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).  
Those impedances could be modified with different impedance values and/or structures, if necessary.


## Package Dimensions

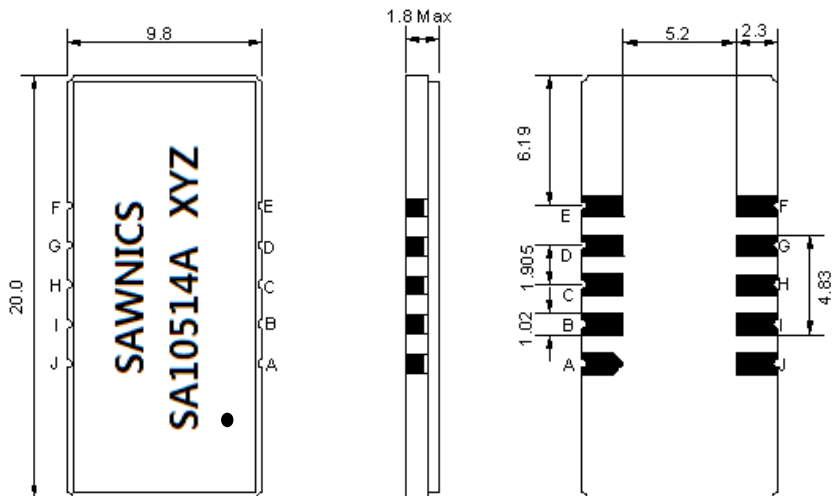

- ① SAWNICS: Brand
- ② SA10514A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

## Testing Environment

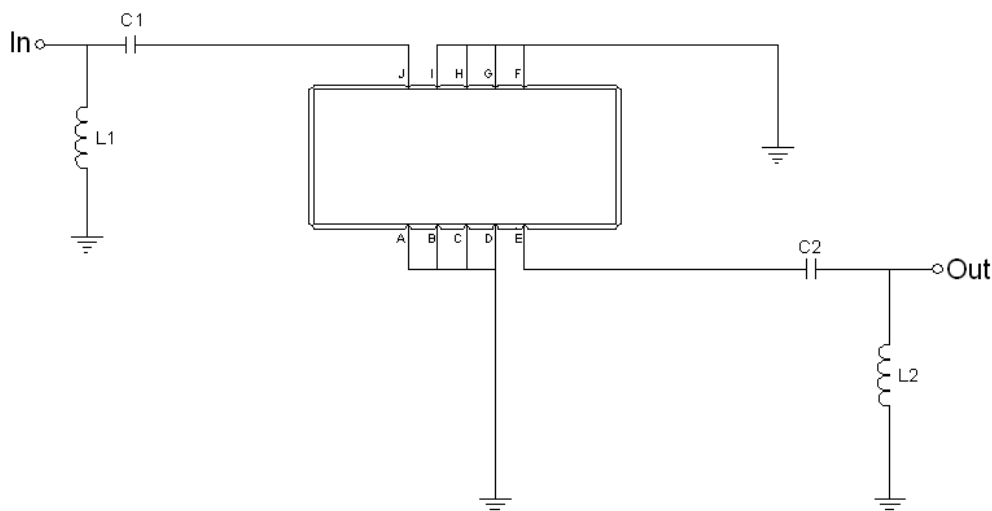

Test Fixture & Values	
Input	L1=120nH, C1=200pF
Output	L2=120nH, C2=200pF
Source/Load Impedance	50 Ω

## Frequency Response


### Bandwidth at -1.0 dB




### Bandwidth at -3.0 dB



### Bandwidth at -40.0 dB

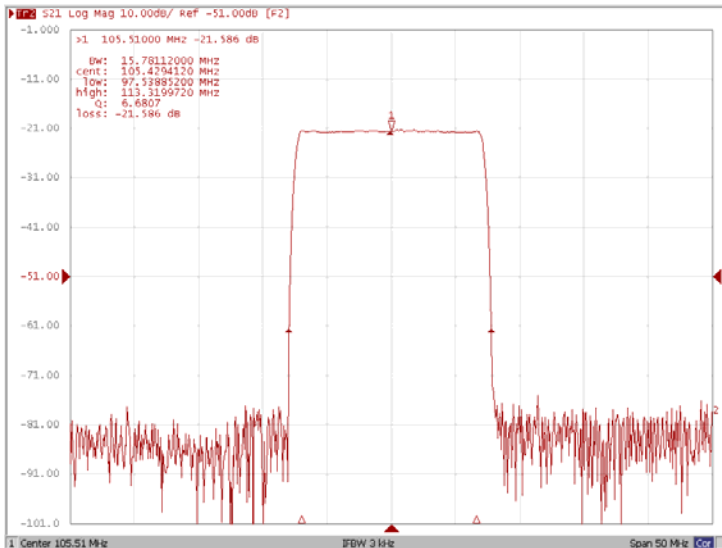


### Bandwidth at -50.0 dB

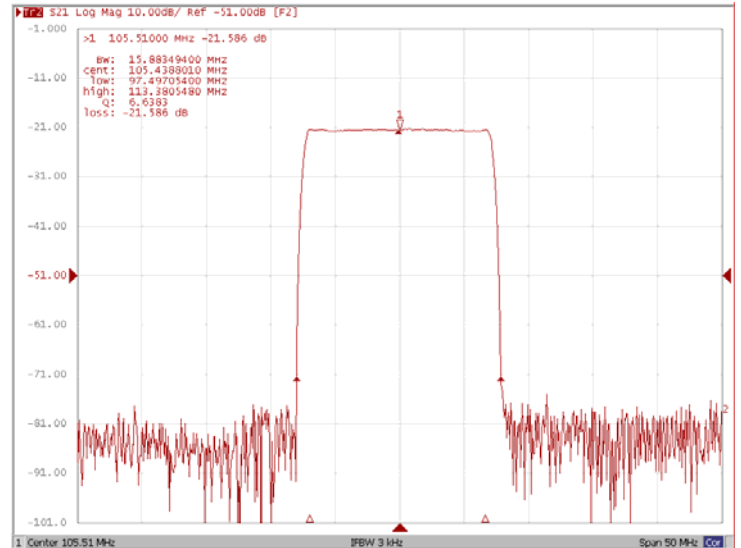


## Frequency Response


### Ripple Variation

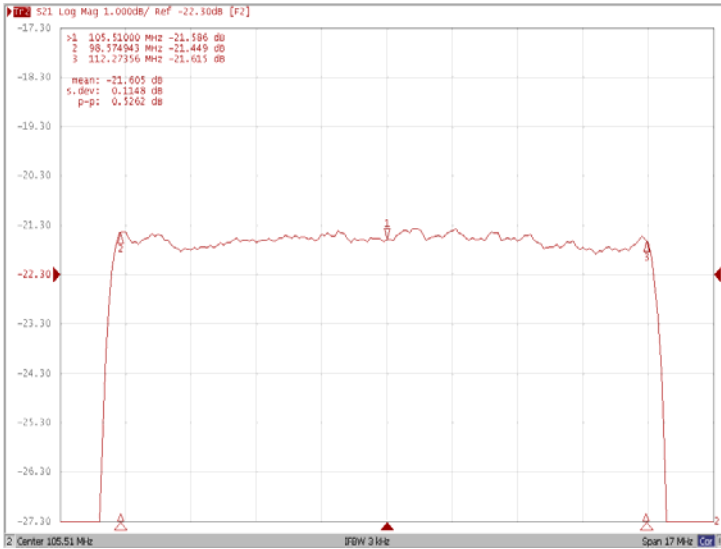

### Group Delay Variation

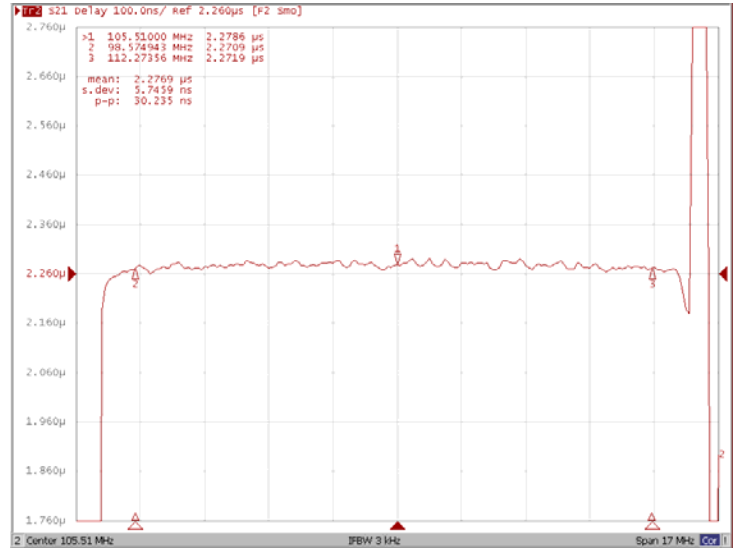

### Smith Chart

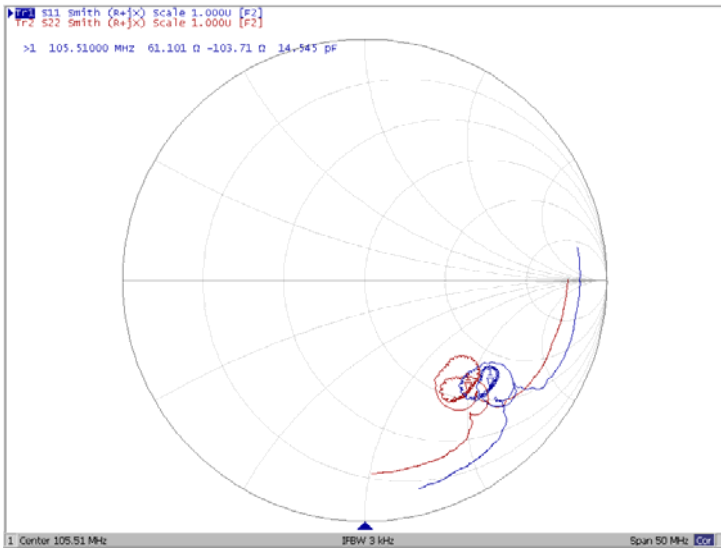

### VSWR

