

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-10	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	140.0	-
Insertion Loss at Fo	dB	-	22.50	24.00
Group Delay Variation (Fo±7.5MHz)	nsec	-	40	70
Absolute Delay	usec	-	2.29	2.50
Passband Ripple (Fo±7.5MHz)	dB	-	0.60	1.00
Bandwidth at -1dB	MHz	15.75	15.90	-
Bandwidth at -3dB	MHz	-	16.22	-
Bandwidth at -40dB	MHz	-	17.58	17.75
Bandwidth at -50dB	MHz	-	17.75	-
Ultimate Rejection	dB	50	53	-
Temperature coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

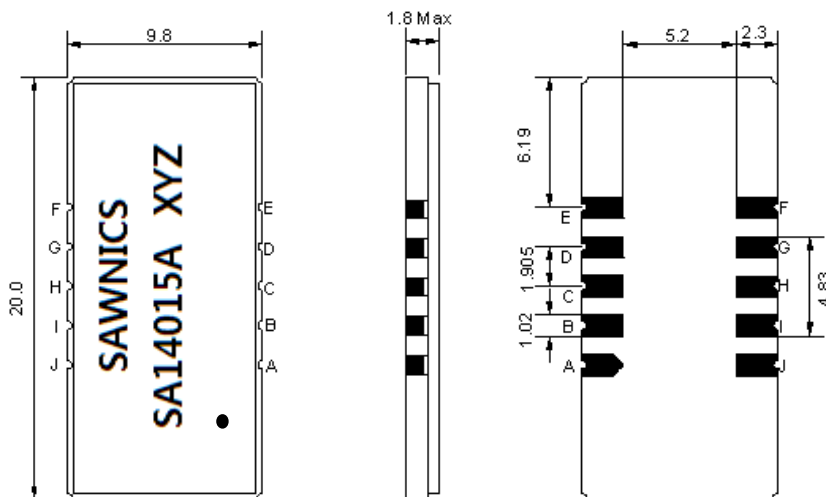

- ① SAWNICS: Brand
- ② SA14015A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

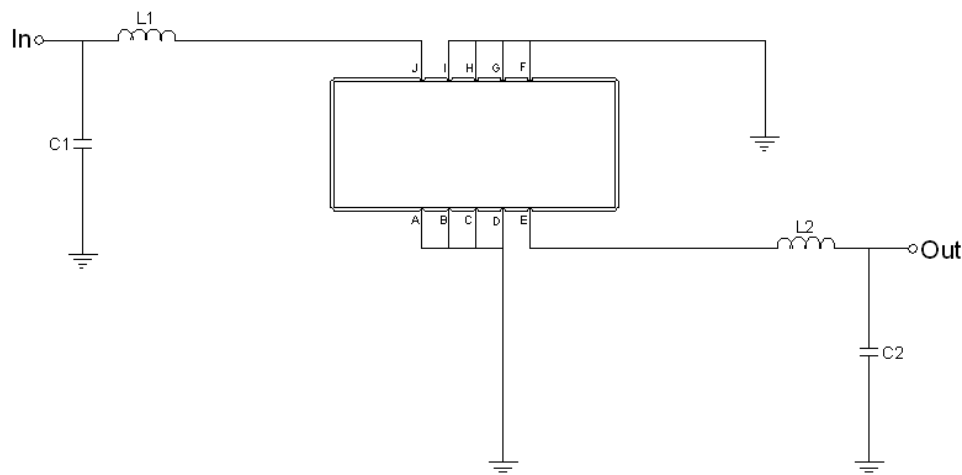


Test Fixture & Values	
Input	L1=33nH, C1=15pF
Output	L2=33nH, C2=15pF
Source/Load Impedance	50 Ω


Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

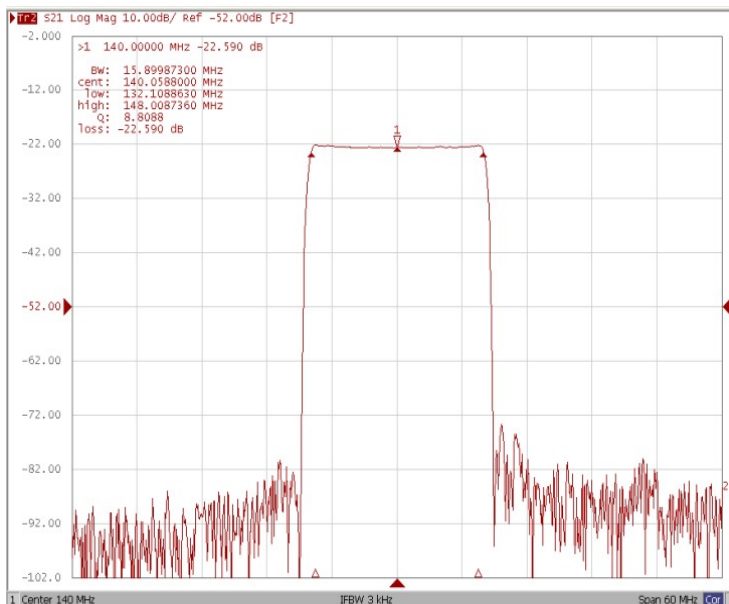


Bandwidth at -3.0 dB

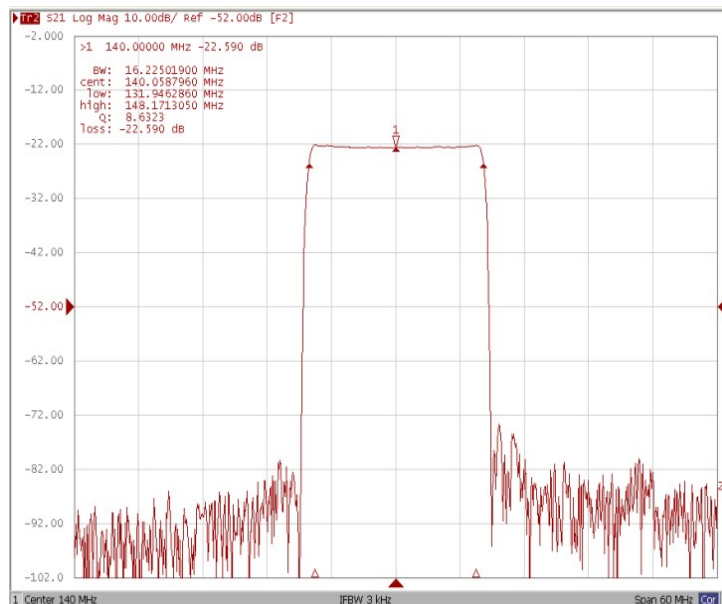

Bandwidth at -40.0 dB

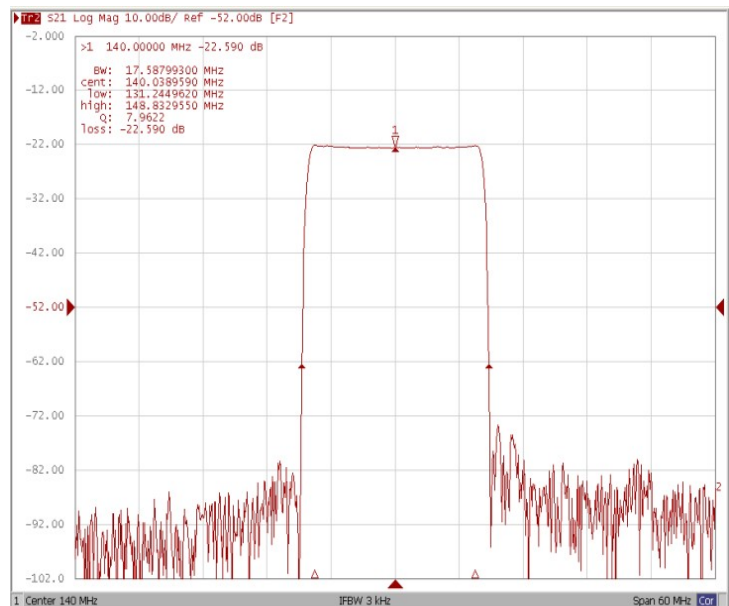


Bandwidth at -50.0 dB

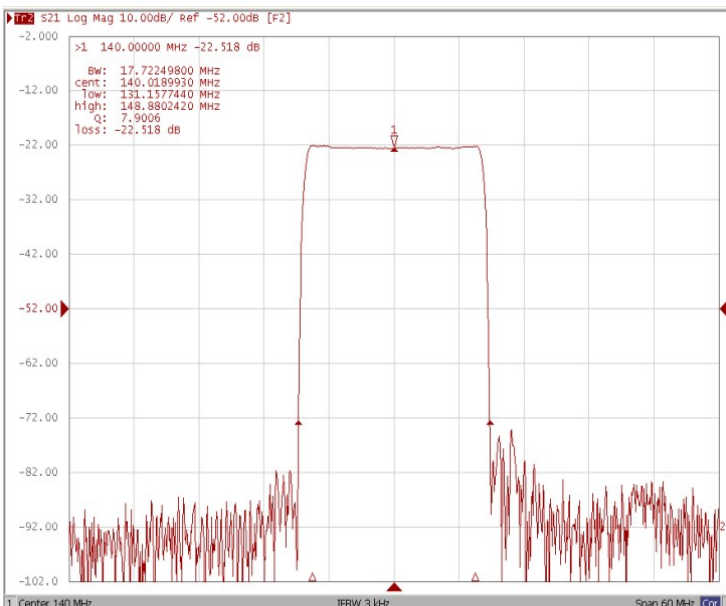


Frequency Response


Ripple Variation Fo±7.5MHz

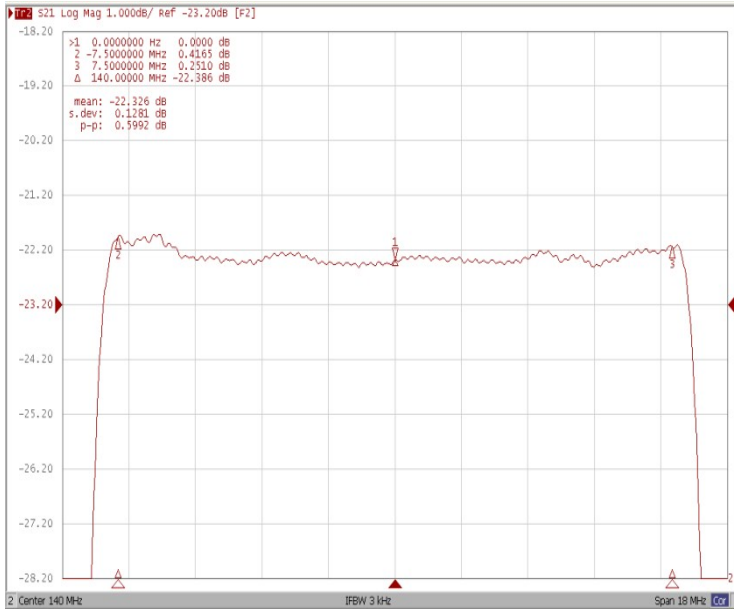

Group Delay Variation Fo±7.5MHz

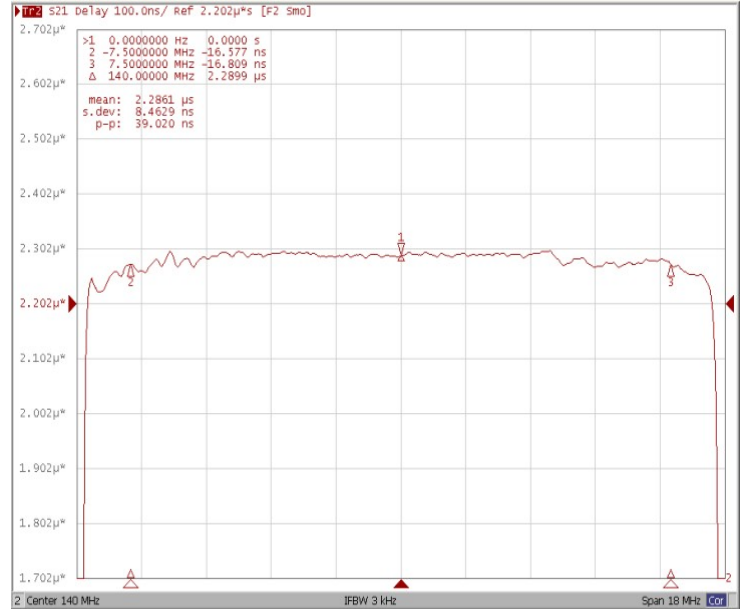

Smith Chart

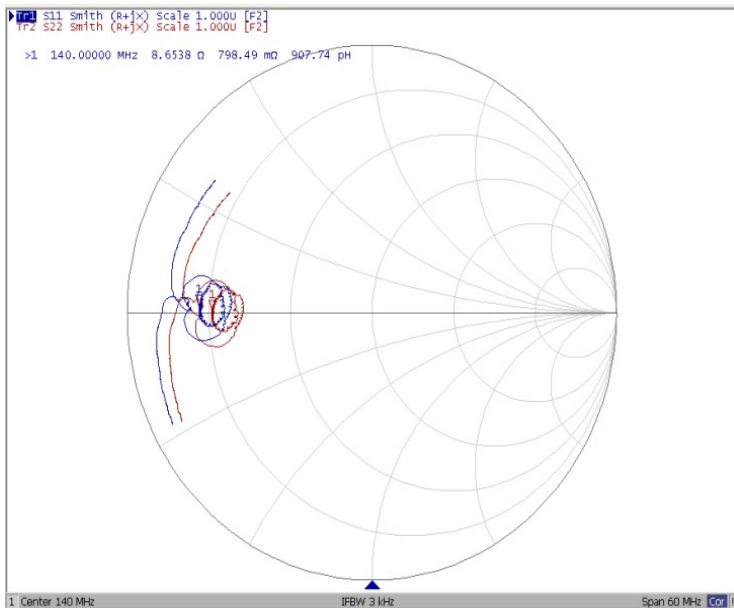

VSWR

