

## Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-10	-	75
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	V			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8


## Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	70.00	-
Insertion Loss at Fo	dB	-	23.80	26.00
Group Delay Variation at Fo ± 7.48 MHz	nsec	-	30	60
Absolute Delay at Fo	usec	-	1.65	-
Passband Ripple Variation at Fo ± 7.48 MHz	dB	-	0.50	1.00
Bandwidth at -1dB	MHz	15.70	16.18	-
Bandwidth at -3dB	MHz	-	16.67	-
Bandwidth at -30dB	MHz	-	18.39	18.70
Bandwidth at -40dB	MHz	-	18.63	-
Ultimate Rejection	dB	45	49	-
Temperature Coefficient	ppm/°C	-	-72	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


## Package Dimensions

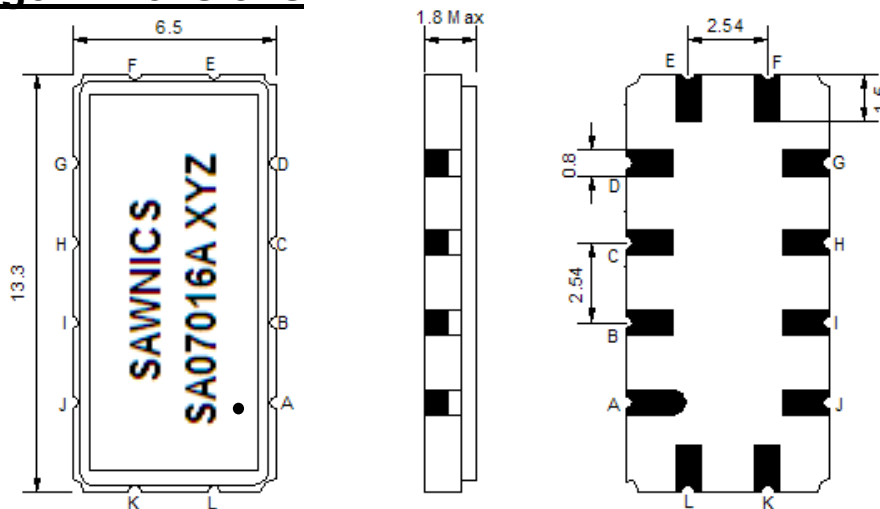

- ① SAWNICs: Brand
- ② SA07016A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

## Testing Environment

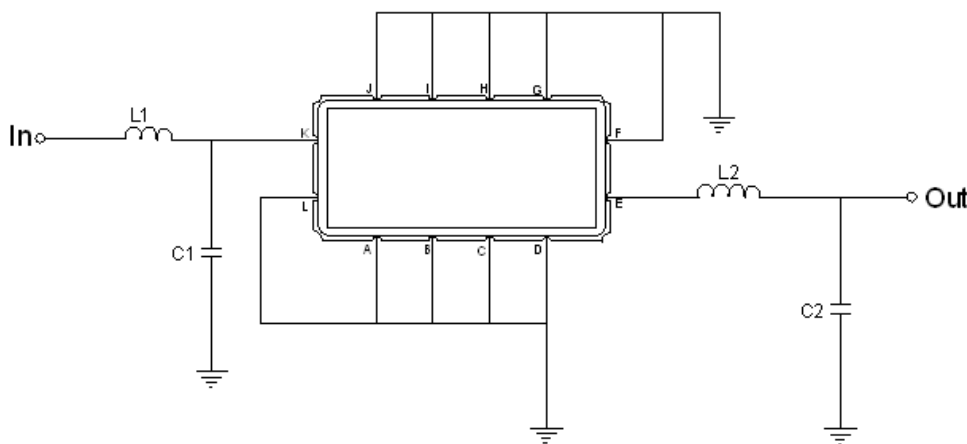

Test Fixture & Values	
Input	L1 = 180nH, C1=12pF
Output	L2 = 180nH, C2=10pF
Source/Load Impedance	50 Ω

## Frequency Response


### Bandwidth at -1.0 dB



### Bandwidth at -3.0 dB



### Bandwidth at -30 dB

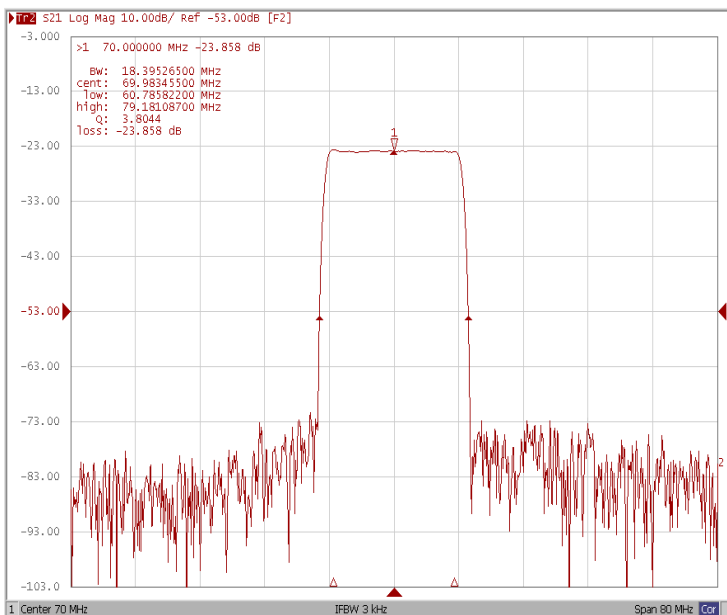


### Bandwidth at -40 dB




## Frequency Response


### Ripple Variation $F_0 \pm 7.48\text{MHz}$

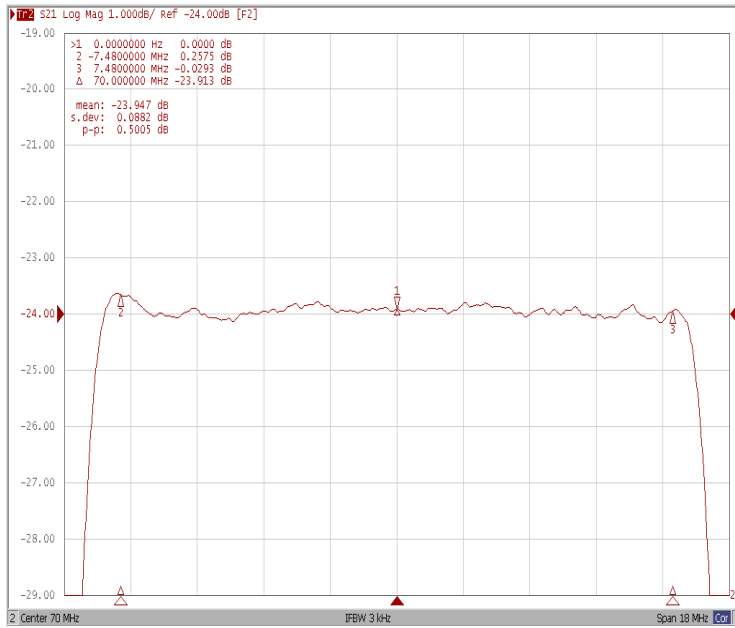

### Group Delay Variation $F_0 \pm 7.48\text{MHz}$

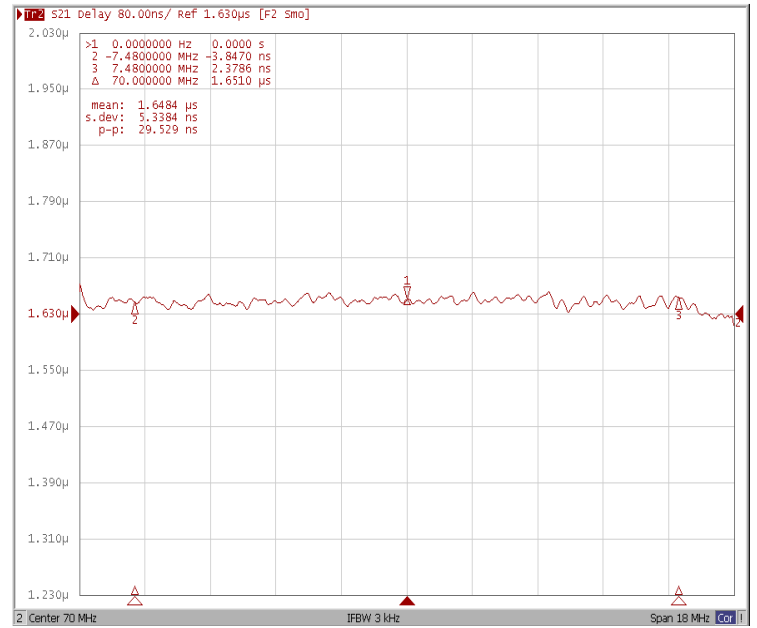

### Smith Chart

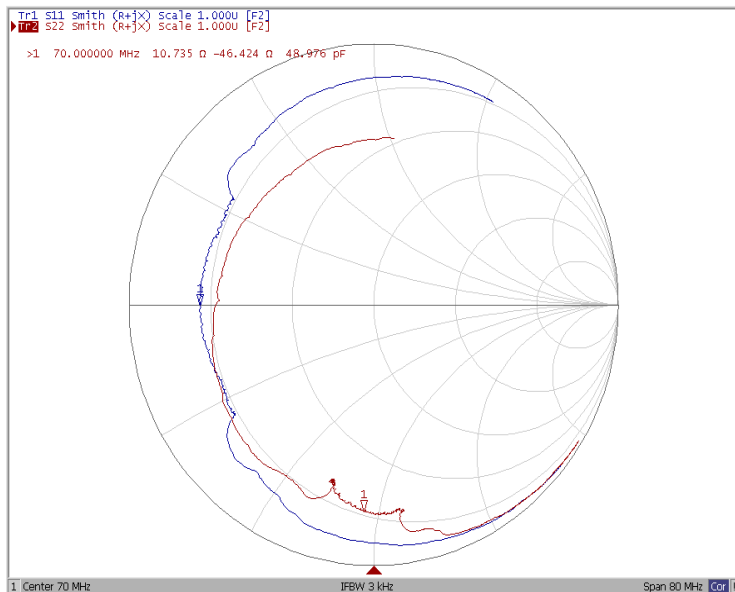

### VSWR

