

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	69.8	70.0	70.2
Insertion Loss at Fo	dB	-	8.2	9.0
Temperature Coefficient	ppm/°C	-	-94	-
Amplitude Ripple Variation at fo ± 2.1 MHz	dB _{p-p}	-	0.7	1.0
Group Delay Variation at fo ±2.0 MHz	nsec	-	110	150
Absolute Delay at Fo	µsec	-	0.85	-
IN/OUT Return Loss at Fo	dB	-	-	-
Bandwidth at -1.0 dB	MHz	5.2	5.6	-
Bandwidth at -3.0 dB	MHz	6.0	6.5	-
Bandwidth at -40.0 dB	MHz	-	9.5	10.0
Relative Attenuation:				
10 ~ 64.5 MHz	dB	40	45	-
75.5 ~ 140 MHz	dB	40	43	-


Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.

Package Dimensions

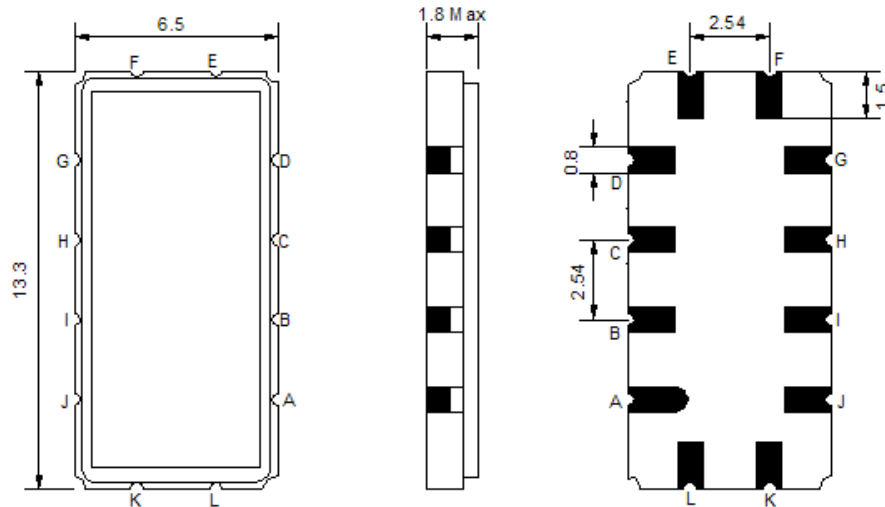

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

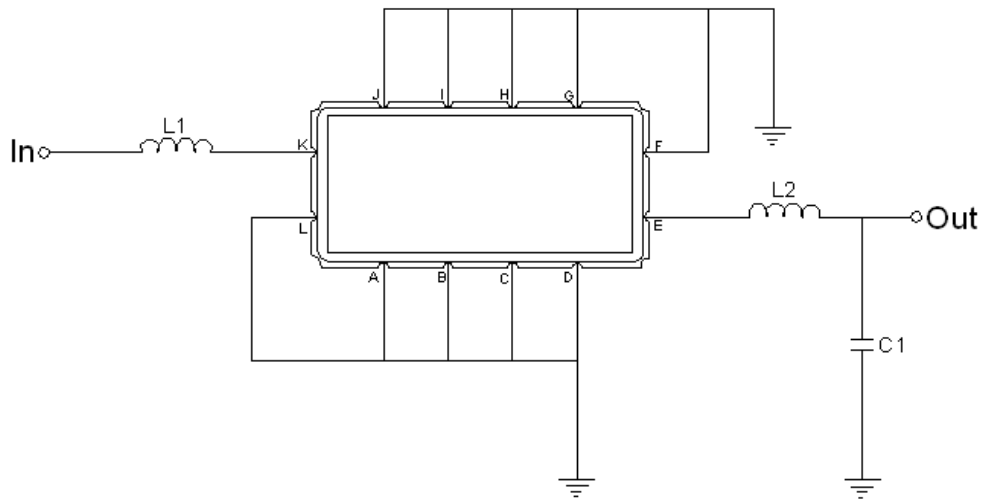

Test Fixture & Values	
Input	L1=220nH Q >40
Output	L2=150nH Q.>40 , C2=5pF
Source/Load Impedance	50 Ω

Frequency Response

